

[TŞ-04.078]

[Rev. D4854]



Gaziray Commuter Train Project

Primary Suspension

Technical Specification

[Issued Date : 06/10/2021]

[Revision Date : 20/04/2026]

	Name	Title	Signature
Approved by	Selçuk ÇAPKAN	R&D Center Coordinator	
Checked by	Turgay BAZ	Branch Manager	
Prepared by	A. Murat ÇUHADAR	Engineer	
	Levent GÜNLÜ	Engineer	

Form No: TTHF-18	Issued Date: 27.04.2021	Rev. No: 00	Form Name: TECHNICAL SPECIFICATION
---------------------	----------------------------	----------------	---------------------------------------

J. M.P.

INDEX

1	INTRODUCTION	6
1.1	SUBJECT	6
1.2	DEFINITIONS	6
1.3	DOCUMENTS AND STANDARDS	7
1.4	EMU TRAIN-SET CONFIGURATION	8
1.5	EMU TRAIN-SET MULTIPLE CONFIGURATION	8
2	SCOPE OF SUPPLY	9
2.1	HARDWARE	9
2.2	SOFTWARE	9
2.3	SPECIAL TOOLS AND EQUIPMENT	9
2.4	CONFORMITY TO THE PROJECT REQUIREMENTS	9
2.5	EC CERTIFICATION OF CONFORMITY AS INTEROPERABILITY CONSTITUENT	9
2.6	PROJECT MANAGEMENT	9
2.6.1	Introduction to Project Management	9
2.6.2	Project Management and Planning	10
2.6.3	Modifications	10
2.6.4	Authorization to Start Manufacturing	10
2.6.4.1	Design freezing	11
2.6.4.2	Authorization to start serial production	11
3	TECHNICAL REQUIREMENTS	12
3.1	INTRODUCTION	12
3.1.1	Vertical Loads (Z) on the Rubber Spring	13
3.1.2	Primary Suspension Displacements	13
3.1.3	Vertical Static Stiffness	13
3.1.4	Radial Loads (X-Y) on the Rubber Spring	15
3.1.5	Radial Static Stiffness	15
3.2	WEIGHT	15
3.3	MANUFACTURING	15
3.4	PAINTING	15
3.5	INTERFACE SPECIFICATION	16
3.5.1	Mechanical Interface	16
3.5.2	Pneumatic Interface	16
3.5.3	Electrical Interface	16
3.5.4	Digital and/or Analogue Inputs/Outputs	16

3.5.5	Earthing.....	16
3.6	ENVIRONMENTAL CONDITIONS.....	16
3.6.1	Climatic Condition.....	16
3.6.2	Noise, Vibration and Shock	16
3.6.3	Protection (IP).....	16
3.6.4	Electromagnetic Compatibility (EMC).....	16
3.7	SYSTEM AND COMPONENTS LIFE	16
3.8	MATERIAL REQUIREMENT.....	16
3.8.1	General Requirements.....	17
3.8.2	Fire Resistance Behaviour	17
4	GENERAL REQUIREMENT	19
4.1	RELIABILITY, AVAILABILITY, MAINTENABILITY & SAFETY (RAMS).....	19
4.2	MAINTENANCE MANUAL	19
4.2.1	Main Features of the Manual	19
4.2.2	Contents of the Manual.....	19
4.2.3	Format of the Manual.....	21
4.3	TRAINING.....	22
4.4	TEST	22
4.4.1	Introduction to Test and Inspection	22
4.4.1.1	Type tests.....	22
4.4.1.2	Routine tests	23
4.4.1.3	First article inspection	23
4.4.1.4	Characteristic of test.....	23
4.4.2	Supplier Technical Assistance	24
4.5	WARRANTY.....	24
4.5.1	Warranty Condition	24
4.5.2	Systematic Fault / Epidemic Failure	25
4.6	ACCEPTANCE.....	25
4.6.1	Final Acceptance.....	25
4.7	PACKAGING, LABELLING AND STORAGE.....	25
4.7.1	Packaging.....	25
4.7.2	Labels/Marking.....	26
4.7.3	Storage Conditions.....	26
4.7.4	Mounting and Handling	26
4.8	DOCUMENTATION TO BE SUPPLIED TO TÜRASAŞ	26
5	ANNEX.....	29

I. LIST OF TABLES

Table 1 – Applicable standards.....	7
Table 2 –Rubber spring quantity	9
Table 3 – Vertical loads.....	13
Table 4 – Radial loads.....	15
Table 5 – Radial static stiffness	15
Table 6 – Material fire requirements	18
Table 7 – Tests required	24
Table 8 – Stage 1 Offer Phase: list of requested documents and due date	27
Table 9 – Stage 2 list of requested documents and due date.....	27
Table 10 – Stage 3 list of requested documents and due date.....	28

II. LIST OF FIGURES

Figure 1 – Trainset layout.....	8
Figure 2 – Rubber spring installation (example)	12
Figure 3 – Vertical load curve (single spring).....	14

III. LIST OF ACRONYMS & ABBREVIATIONS

EMU	Electric Multiple Unit
DeBo	Designated Body
EN	European Norm
FAI	First Article Inspection
IEC	International Electro technical Commission
ISO	International Organization of Standardization
LRU	Line Replaceable Unit
N/A	Not Applicable
NoBo	Notified Body
PRM	Person with Reduced Mobility
RAMS	Reliability, Availability, Maintainability and Safety
SI	International System
TBC	To be confirmed
TBD	To be defined
TOR	Top of Rail
UIC	Union International Chemin de Fer

1 INTRODUCTION

1.1 SUBJECT

This document describes the technical requirements for the procurement of the Primary Suspension to be installed on the bogies of Electrical Multiple Units (hereafter called EMU) produced by Turkish Railway Vehicles Industry Inc. (hereafter called TÜRASAŞ).

The bidder shall offer a solution totally compliant with the requirements of this specification.

After signing the contract, possible deviations from this specification or from other specifications and norms mentioned in this document, shall be validated by written agreements between TÜRASAŞ and the Supplier.

The Bidder shall make clause by clause comment into present technical specification together with their offer.

This technical specification and its annexes already prepared in Turkish and English language. The Turkish language shall be prevailing in case of any discrepancy among them.

IMPORTANT NOTE:

The present document shall be examined by the Bidder, together with following document:
TŞ-01.139 –GENERAL TECHNICAL SPECIFICATION
in order to know general applicable requirements established at train level.

1.2 DEFINITIONS

Within this technical system specification, the following definitions are applied to the words reported below:

- “the Administration” means the Turkish Rail Vehicle Industry Co. (hereafter called TÜRASAŞ)
- “the Designer” means BLUE Engineering that is the company responsible for the design EMU set
- “the Supplier” means the company who wins the tender to supply the good object of this specification
- “documentation” means all or any specifications, drawings, reports, networks, operating and maintenance manuals and all other information whether on paper or on magnetic or other format which is prepared by the Supplier in the course of the contract

“the Bidder” means the company who want to join to the tender to supply the good object of this specification.

1.3 DOCUMENTS AND STANDARDS

The EMU shall be designed, assembled and tested according to the following international reference standards:

European Standards: TSI, EN;
International standards: UIC; ISO; IEC;
System of units shall be SI.

Table 1 reports the applicable standards request for the scope of supply.

Standard	Year	Title
TSI LOC&PAS	2023	COMMISSION REGULATION concerning a technical specification for interoperability relating to the 'rolling stock locomotives and passenger rolling stock' subsystem of the rail system in the European Union.
EN 45545-2	2023	Railway applications - Fire protection on railway vehicles
EN 13913	2003	Rubber Suspension Components – Elastomer-based mechanical parts.
EN ISO 2081	2009	Metallic and other inorganic coatings - Electroplated coatings of zinc with supplementary treatments on iron or steel.
EN 50126	2017	Railway applications - The Specification and Demonstration of Reliability, Availability, Maintainability and Safety (RAMS)

Table 1 – Applicable standards

If it is not specified otherwise, the applicable version of the standards mentioned in the text of the document is the one specified in Annex 1 of “TŞ-01.139 –General Technical Specification” or in the above table.

The Bidder shall review and confirm compliancy to the above list of applicable norms, any deviation shall be submitted to TÜRASAŞ for approval. The Bidder shall declare if its system/equipment is compliant with other national/international or railroad administration standards not mentioned in the above list.

1.4 EMU TRAIN-SET CONFIGURATION

EMU is composed by:

- 4 cars: SKA car, OA car, OA car: SKA car

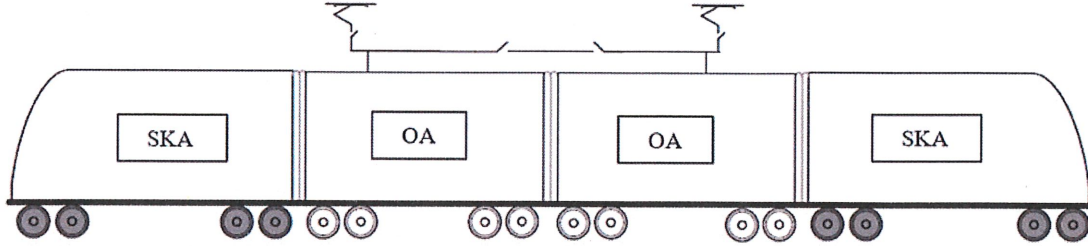


Figure 1 – Trainset layout

The of the cars are explained below:

SKA = Leading car with driver cab

OA = Intermediate car

The SKA vehicles will be interchangeable and the OA vehicles will be interchangeable.

The EMU will be fixed configuration unit: the orientation of the different type of vehicles within a unit is fixed. The unit wheel arrangement will be the following: Bo'Bo'+2'2'+2'2'+Bo'Bo'

1.5 EMU TRAIN-SET MULTIPLE CONFIGURATION

The configurations foreseen for the multiple unit operation are the following:

4 cars + 4 cars

4 cars + 4 cars + 4 cars

2 SCOPE OF SUPPLY**2.1 HARDWARE**

The Supplier shall provide all relevant components related to manufacturing and assembly of primary suspension conical rubber spring.

The quantity of conical springs for one trainset are reported in the following table;

Part	Drawing No	Per Car				Per 4 Car Train Set
		SKA	OA1	OA2	SKA	
Conical Rubber Spring	GZ90.04.10.00006	16	16	16	16	64

Table 2 –Rubber spring quantity

2.2 SOFTWARE

N/A

2.3 SPECIAL TOOLS AND EQUIPMENT

The Bidder shall supply special tools and equipment according to TD-GZ.04.0146 as mentioned in Annexes.

2.4 CONFORMITY TO THE PROJECT REQUIREMENTS

The EMU train set shall be certified according to TSI PAS/LOC, TSI NOI, TSI PRM, TSI SRT and TSI CCS by Notified Body (NoBo) / Designated Body (DeBo).

The Supplier shall provide whole calculations, drawings, analysis, test reports and other kind of documentation which is requested by TSIs for the present scope of supply.

2.5 EC CERTIFICATION OF CONFORMITY AS INTEROPERABILITY CONSTITUENT

N/A

2.6 PROJECT MANAGEMENT**2.6.1 Introduction to Project Management**

The Supplier and its sub-suppliers shall be responsible for the components and systems delivered. TÜRASAŞ has the right to request different solutions and/or modifications of a system or components in case they are necessary for reasons related to installation, operation, interfacing or other equivalent reasons. Such written requests shall be realized by the Supplier.

During the meetings, the minutes shall be drawn up and countersigned by the representatives of the parts participating the meeting.

Present document is a part of the contract between the Supplier and TÜRASAŞ. The Supplier is not entitled to distribute this document or any part of it to a third party.

All generic information requests and answers shall be communicated in written form or through e-mail, if an official form is required, and in the case the exchanged communication preludes to any kind of action.

2.6.2 Project Management and Planning

The Supplier shall submit a project plan within two weeks of contract award.

This project plan reports the schedule for all main activities and key events, including submission of all information identified in this specification and delivery of all parts and documentation. The plan shall be subject to approval of TÜRASAŞ, every time it is issued.

The Supplier shall attend regularly to the project progress meetings according to the established schedule proposed by TÜRASAŞ.

2.6.3 Modifications

All engineering changes made prior to FAI (First Article Inspection) shall be controlled by the Supplier's quality management system. Engineering changes made after FAI shall be supported by all relevant documentation and subject to written approval by TÜRASAŞ. Engineering changes shall be subject to all requirements of this specification and any supporting specifications.

The supplier shall take maximum care to refrain from any modifications/changes that will affect interface with other parts. In case it is necessary to carry out such a modification, TÜRASAŞ will be notified immediately.

The Supplier shall agree with TÜRASAŞ a modification implementation plan detailing timescales and locations where the work shall be carried out. This shall include modifications to any relevant spare parts.

The Supplier shall, on the day of completing any modification, provide TÜRASAŞ with the date of modification, serial number of components modified, new modification level of component and location of component. In addition, the status of the modification level on the component shall be updated.

Modifications made to improve the product or production without any effect on performance or spare part exchange can be decided by the Supplier. Traceability of modifications shall be given by the Supplier to TÜRASAŞ.

In case of modifications due to Supplier design inaccuracy or whatever cause under its responsibility, the subsequent recovering modifications and actions shall be done by the Supplier free of charge.

2.6.4 Authorization to Start Manufacturing

TÜRASAŞ will release to the Supplier the authorization to start the manufacturing according to the following steps.

2.6.4.1 Design freezing

After signing the contract, a dedicated meeting shall be held for freezing the design of the scope of supply between the Supplier, the Administration, the Designer and/or the End Client. The date and place of the meetings shall be agreed mutually.

The design freeze also means that the Supplier can start manufacturing the products used for type tests (according to item 4.4.1.1).

In case the dedicated meeting cannot be held because of unseen reasons like epidemic etc., the dedicated documentation shall be signed and shared by all four parties.

2.6.4.2 Authorization to start serial production

After successful completion of tests in accordance with clause 4.4.1.1 and 4.4.1.3, TÜRASAS will release to the Supplier the authorization to start the serial production.

3 TECHNICAL REQUIREMENTS

3.1 INTRODUCTION

The bogie primary suspension consists of four conical rubber spring for each wheelset.

The spring, shown in the drawing cod: GZ90.04.10.00006, is a rubber /metal part, designed according to EN 13913 and assembled between the axlebox and bogie frame (see drawing cod. GZ10.04.00.00000 and GZ11.04.00.00000).

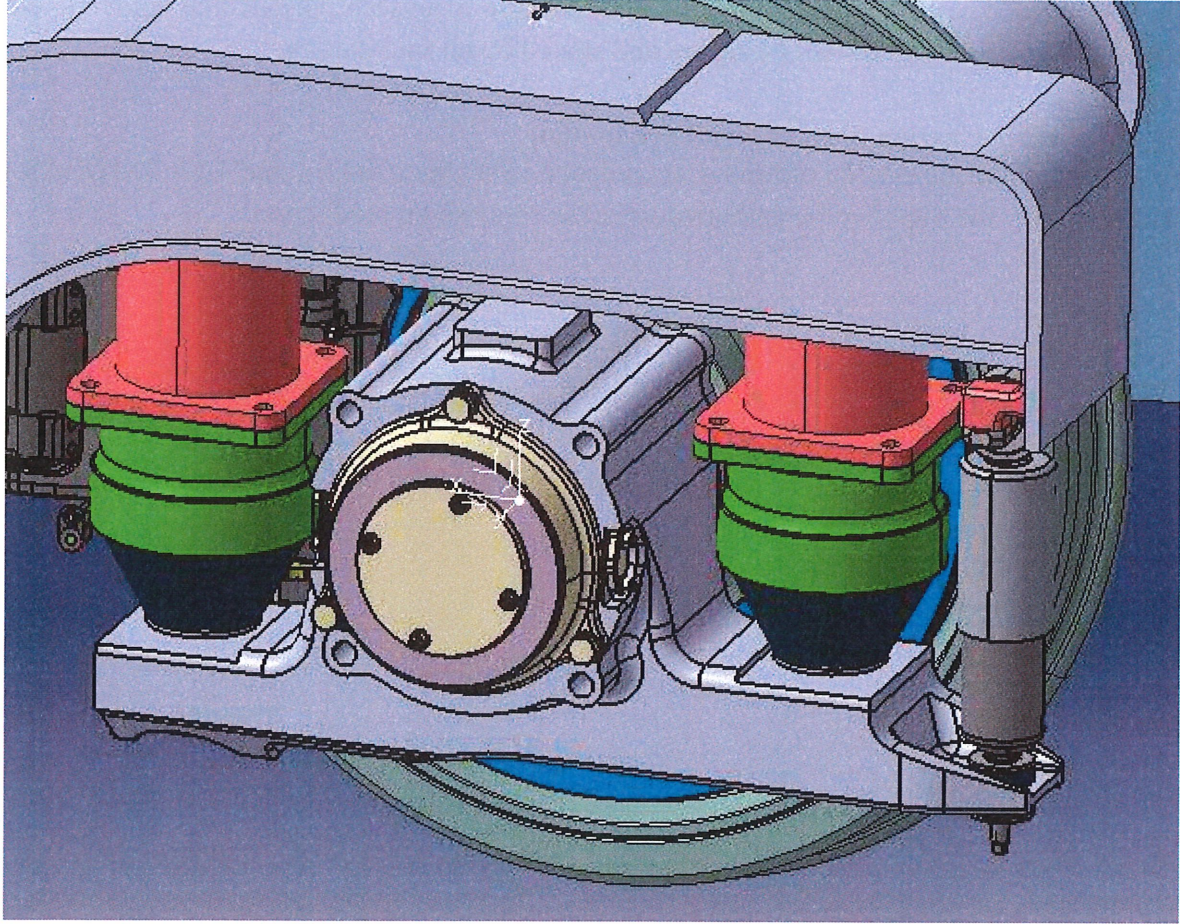


Figure 2 – Rubber spring installation (example)

3.1.1 Vertical Loads (Z) on the Rubber Spring

Considering the element reference axis parallel to the vehicle axis:

- X axis parallel to the rail
- Y axis transverse to the rail
- Z axis vertical

LOAD CONDITIONS (Z) (Single spring)	Value [kN]
AW0	25,1
AW1	27,3
AW2	33
AW3	35,8
AW4	39,9
Max. Dynamic	52

Table 3 – Vertical loads

- AW0 – (Working Order) Maximum mass of the vehicle ready for run, without any passenger
- AW1 – (Comfort load) Mass when all seats are occupied (passengers + driver) + AW0
- AW2 – (Normal Load) Mass with 4 passengers/m² in standing area + AW1
- AW3 – (Fully Load) Mass with 6 passengers/m² in standing area + AW1
- AW4 – (Crush Load) Mass with 8 passengers/m² in standing area + AW1

3.1.2 Primary Suspension Displacements

Vertical displacements (Z):

+ 28 mm
- 25 mm

Transversal displacements (Y):

± 5 mm

Longitudinal displacements (X):

± 5 mm

3.1.3 Vertical Static Stiffness

The vertical stiffness in new condition value shall be 0,8 kN/mm ±%15 at AW0 and 1,2 kN/mm ±%15 at AW3 according to the graph below.

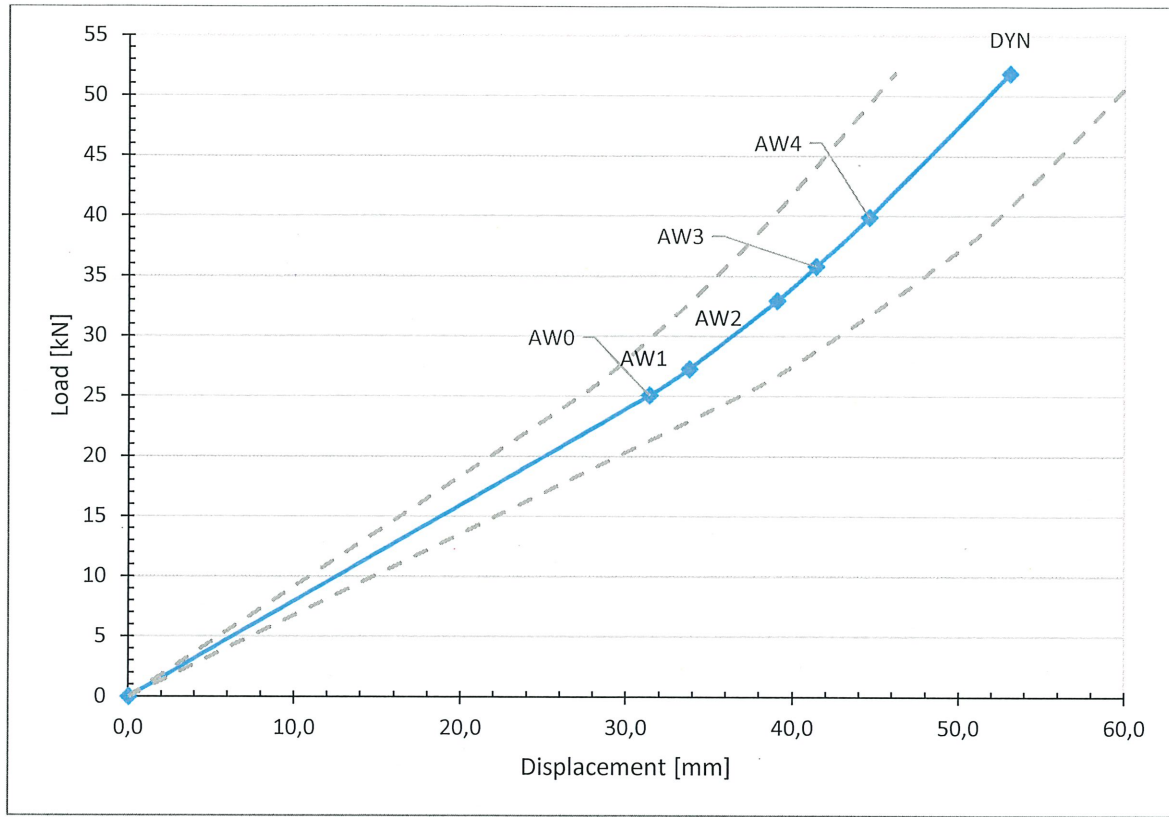


Figure 3 – Vertical load curve (single spring)

The Supplier shall communicate the complete characteristics according to load conditions and displacements mentioned in this specification.

Furthermore, the Supplier shall already indicate, in the offer phase, the calculated creeping after 3 months and 7 years.

In any case the difference should be within the following ranges:

- 0 ÷ 5 mm after 3 months
- 5 ÷ 8 mm after 7 years

The Supplier shall declare the creeping value after 48 hours to be used when the Administration perform the bogie setup (under-press test).

3.1.4 Radial Loads (X-Y) on the Rubber Spring

Considering the element reference axis parallel to the vehicle axis:

- X axis parallel to the rail
- Y axis transverse to the rail
- Z axis vertical

<i>LOAD CONDITIONS (Single spring)</i>	<i>SERVICE [kN]</i>	<i>EXCEPTIONAL [kN]</i>	<i>COLLISION [kN] (Valid only for metal parts)</i>
Longitudinal (X)	9,2	25	42.5
Transversal (Y)	12	18	-

Table 4 – Radial loads

3.1.5 Radial Static Stiffness

Radial stiffness in new condition of elastic element is shown in the following table:

	<i>stiffness [kN/mm] ±15%</i>	
	<i>AW0</i>	<i>AW3</i>
Cr	6	8 ÷ 9

Table 5 – Radial static stiffness

3.2 WEIGHT

The Supplier shall be committed to the process of weight management required in order to meet target weights as the train design develops.

The target weights for this component shall be ≤ 30 Kg.

3.3 MANUFACTURING

N/A

3.4 PAINTING

The painting shall be done according to technical document TD-GZ.10.0055.

The Supplier can propose its own painting specification to the Administration. The usage of this painting specification is dependent on the Administration approval.

Concerning resistance to corrosion, design and processes shall take in account the effect of potential galvanic corrosion.

The colors of the products (RAL codes) will be defined by the Administration.

3.5 INTERFACE SPECIFICATION

3.5.1 Mechanical Interface

Refer to interface of axlebox shown in the drawing GZ90.04.10.00004.

The upper stop mechanism shall be able to lift the powered wheelset during bogie lift.

The wheelset target weight is: 1900kg.

Number of conical springs for wheelset: 4.

3.5.2 Pneumatic Interface

N/A

3.5.3 Electrical Interface

N/A

3.5.4 Digital and/or Analogue Inputs/Outputs

N/A

3.5.5 Earthing

N/A

3.6 ENVIRONMENTAL CONDITIONS

3.6.1 Climatic Condition

The system object of the present document specification shall work properly in the specified climatic conditions (temperature, rain, snow, ice, dust, sand, wind and so on) in particular, ice, sand and snow shall not be cause of malfunction.

General climatic conditions are reported in the mentioned TŞ-01.139 General Technical Specification.

3.6.2 Noise, Vibration and Shock

N/A

3.6.3 Protection (IP)

N/A

3.6.4 Electromagnetic Compatibility (EMC)

N/A

3.7 SYSTEM AND COMPONENTS LIFE

The component shall be designed and manufactured so to ensure that the stiffness and damping remain into the limits of $\pm 25\%$ of maximum decay of the nominal value, both for losses and increases for at least 1.500.000 Km of service or 7 years.

3.8 MATERIAL REQUIREMENT

The conical rubber spring designed according to EN 13913 is composed by:

- **Metal parts** material: shall be made of steel. The Supplier shall notify to the customer in bidding phase the proposed material standard.

Regarding galvanizing treatment, see drawing GZ90.04.10.00006.

- **Rubber parts** material: the Supplier shall notify in bidding phase the Shore hardness.

3.8.1 General Requirements

Materials shall be suitable to allow the normal maintenance activities without need to adopt special protections including welding, cuts and so on. They shall be suitable for the waste disposal without need of particular care.

All information about safety and health shall be provided, even for consumables like glue and cleaning agents.

The choice of materials shall be done to prevent corrosion in every usage condition.

3.8.2 Fire Resistance Behaviour

The trainset has been classified into Category A for rolling stock fire safety, according to TSI LOC&PAS for interoperability operation.

The supplied system/equipment/components including all their elements therefore shall be compliant to the applicable sections of EN 45545 family norms (-1, -2, -3, -4, -5, -6).

According to EN 45545-1 and -2 the trainset is ranked as 2N (or N2) where:

- 2 indicates the operation category
- N indicates the design category

The fire performance requirements established for materials are given by means of R(n) index reported by the EN 45545-2 “table 5”.

These performances requirements of materials and components depend not only on their intrinsic nature but also on the location, the shape and the layout, the surface exposure, the relative mass and the thickness of considered material. In “table 2” of the EN 45545-2 are listed different products and their location on the trainset to identify the relevant R(x) requirements.

The Supplier shall follow the instruction of paragraph 4.2 “General” and paragraph 4.3 “Grouping rules” with the flowchart of Figure 1 “Assessment Process – grouping rules” of EN 45545-2 not only to identify all the material eventually not mentioned hereafter or not mentioned at all in the “table 2”, but also to verify if the requirements are applicable or not (i.e. in case of small quantity, small mass, small exposed areas and so on).

To complete the punctual requirements identification in EN 45545-2 “table 5”, the Hazard Level “HL2” shall be used. This hazard level has been determined on the basis train-set classification 2N and it identifies the relevant tests pass-no-pass condition.

Concerning the materials used for the scope of supply of present technical specification following requirements have been identified.

Applicable Product type (No)	Definition	Details	Requirement
M1	Flexible metal/rubber unit	Flexible metal/rubber unit including elements in bogies	R9

Table 6 – Material fire requirements

The Supplier shall adopt materials with required characteristic and also identify other materials not mentioned above. The above R(x) list is not definitive; the Supplier shall complete it according the materials used in the scope of supply.

The Supplier shall give the list of the inflammable materials used with material type, quantity and fire resistance behaviour tests.

The documentation presented by the Supplier relevant fire performance will be examined for approval by the Notified Body/Designated Body in charge of TSI certification. The Supplier shall be responsible to perform all necessary activities which are required by Notified Body.

4 GENERAL REQUIREMENT

4.1 RELIABILITY, AVAILABILITY, MAINTENABILITY & SAFETY (RAMS)

The Supplier shall make RAMS analysis according to TD-GZ.04.0146 as mentioned in Annexes.

4.2 MAINTENANCE MANUAL

4.2.1 Main Features of the Manual

The Supplier shall prepare integrated manual for the operation and maintenance of its scope of supply equipment.

The manuals shall contain:

- supplied system/equipment description;
- preventive maintenance tasks description;
- corrective maintenance tasks description (repair instructions included).
- information in order to carry out the overhaul of the system/equipment and the heavy repair (if it is repairable and off train).

The manual will be used as the basis for train operation and maintenance by the End Client staff. The manual shall be prepared in electronic editable format and the language UK English and Turkish.

If the Supplier submit the manuals in their own format, the documents shall be in editable format.

4.2.2 Contents of the Manual

The manual shall contain as minimum the following information/instructions:

Description and operation

- General description and operation of system/equipment
- Functional description and operation of all LRU's and components
- Mechanical and electrical data sheets for all LRU's and components.

Maintenance activities

- Preventive maintenance plan including the maintenance periodicity (frequency) table for system/equipment.
- Reported information shall be the same of those described by the preventive maintenance analysis and be linked with detailed maintenance instructions.
- Preventive maintenance plan shall report reference to specific/special tools needed for the maintenance works (if used).

- Maintenance instructions shall report step by step detailed description of each task of the maintenance plan in order to include all information necessary for carrying out the relevant work.
- The preventive maintenance plan shall include all activities foreseen for the system/equipment from daily inspection up to major repair/overhaul.

Preventive maintenance card/instruction

Each maintenance instruction shall include:

- task periodicity
- safety warnings
- cleaning materials
- recommended lubricants
- torque values
- special tools (if any): as special tool is intended either a tool (hardware and/or software) that is exclusively produced by the Supplier and is essential for system/equipment maintenance, either a tool available on market but expensive, sophisticated, with long lead time and so on
- step by step activity description with necessary schemes, drawings and illustrations, including:
 - scheduled activities (greasing, topping up, visual check, etc)
 - removal and refitting
 - off-train overhaul
 - final functional check

The Supplier is responsible to update the maintenance instructions until the end of the general warranty period of the last supplied equipment.

Corrective maintenance card/instruction

Each maintenance instruction shall include:

- trouble shooting
- safety warnings
- torque values
- special tools (if any).

- step by step activity description with necessary schemes, drawings and illustrations, including:
 - removal and refitting
 - off-train repair
 - failure diagnosis
 - final functional check

The Supplier is responsible to update the maintenance instructions until the end of the general warranty period of the last supplied equipment.

Special tools

The use of special tools shall be avoided, nevertheless if they are essential for maintenance (upon Supplier and TÜRASAŞ agreement), following information shall be supplied in a dedicated section of the maintenance manual:

- descriptions and technical data (including SW if present)
- drawings
- use instructions
- list of tasks where the tools usage is mandatory (maintenance cards shall refer to the relevant special tools when is needed).

all the information for purchasing it correctly (technical data, builder, price, and so on) if the special tool is available on the market.

4.2.3 Format of the Manual

The format of the maintenance manual can vary according to the Administration and the End Client requirements, therefore here following are reported some rules generally applicable.

Specific requests shall be communicated when available.

- The manual shall report/contain the same references, drawings, schemes, component codes, part numbers, definitions, descriptions, terminology and so on used in the system/equipment configuration and design documentation to guarantee a perfect correspondence and to avoid mismatching during tasks performance.
- It is highlight the importance for a correct identification of LRUs/components by utilizing the same identification name reported by the technical drawings.
- The manual shall be transmitted by electronic means (CD copy) and in the final version a paper copy is also requested for each release.

- The documentation in electronic format shall be in a completely editable form (Office Word version TBD)
- The PDF format can be used as formal delivery of the documentation (in order to be used as official delivery towards the End Client)
- Pictures and photos shall be inserted and not simply linked.
- Photos should be only JPEG format.
- Pictures should be only TIFF format.

Derogations from above listed issues can be discussed and agreed between TÜRASAŞ and the Suppliers pending the respect of the End Client requirements.

4.3 TRAINING

N/A

4.4 TEST

4.4.1 Introduction to Test and Inspection

The Supplier shall perform the tests and the inspection in accordance with the approved test procedure and the approved inspection specification.

TÜRASAŞ have the right to witness any of these tests and inspections at any stage of test and inspection procedure.

All test and inspection specifications and reports including all repair activities and check lists shall be submitted and approved by TÜRASAŞ.

If it is a proven system, the Supplier for the system shall give a certificate of conformity indicating in which it has proven itself before and in which projects it has been used. In the request of TÜRASAŞ, the Supplier will show the existing test reports and certificates to TÜRASAŞ and the Notified Body (NoBo)/the Designated Body (DeBo).

4.4.1.1 Type tests

Type tests are required to verify that the components of the system object of the scope of supply operate in accordance with the approved design data.

TÜRASAŞ's attendance to type tests does not end the responsibility of supplier from any inconsistencies.

The Supplier shall perform type tests, in accordance with a test procedure approved by TÜRASAŞ. TÜRASAŞ and/or the End Client have right to attend or not attend the tests.

The Supplier has the responsibility for the success of mentioned type tests.

During testing, the criteria shall be observed and recorded in a logbook and necessary alterations, adjustments and maintenance works shall be carried out.

In the case components are already being used in similar projects the supplier shall submit to TÜRASAŞ for approval a report explaining in detail the reasons for which it believes the tests need not be carried out, providing evidence of that.

4.4.1.2 Routine tests

Routine tests are required to verify that the components of the system object of the scope of supply have been built in such a way that it satisfies the requirements of the approved design data as verified by the type test.

The Supplier shall perform routine tests in accordance with a test procedure approved by TÜRASAŞ under his responsibility, and, if necessary, with TÜRASAŞ participation.

During tests, the criteria shall be observed and recorded in a logbook and necessary alterations, adjustments and maintenance works shall be carried out.

Records from routine tests shall be kept by the Supplier and made available timely for TÜRASAŞ inspection.

Additional copies of records of all tests/inspections results shall also be kept at the Supplier's work to be made available to TÜRASAŞ or their representative on demand.

This test shall include functional test, visual inspection and dimensional inspection, as a minimum. The test details shall be approved.

4.4.1.3 First article inspection

The Supplier shall perform a First Article Inspection (FAI) of the components at the Supplier's factory with TÜRASAŞ and/or End Client participation in accordance with an inspection specification issued by Supplier and approved by TÜRASAŞ, prior to serial production in order to confirm that the component fully complies with the design criteria and manufacturing process. The supplier shall submit FAI test procedure and invitation to TÜRASAŞ at least 6 weeks before FAI. If any changes are requested by TÜRASAŞ, supplier shall comply with these requests.

At the FAI, the Supplier shall make available all pertinent design and manufacturing process documentation, test records, material certifications, etc. If all the requirements of the FAI not be met, then the inspection shall be considered at a hardware review.

The component shall meet or exceed the quality standards set at the FAI and shall incorporate any comments made by TÜRASAŞ and /or the End Client at the FAI.

4.4.1.4 Characteristic of test

The Supplier shall perform at least the tests (X) reported in the following table, according to EN 13913.

CHARACTERISTIC	SUB-CLAUSE	TYPE TEST	ROUTINE TEST
General test condition			
Functional test at normal and low temperature	7.1.1.2	X	-
Resistance to environmental conditions			

CHARACTERISTIC	SUB-CLAUSE	TYPE TEST	ROUTINE TEST
Oil and petroleum products	7.2.5	X	-
Chemical product	7.2.6	X	-
Corrosion	7.2.9	X	-
Resistance to operating conditions			
Fatigue resistance (axial and radial) **	7.3.1	X	-
Performance test	7.3.1.4	X	-
Static creep	7.3.2	X	-
Physical characteristics			
Material	7.4.1	X	-
Mass	7.4.2	X	X
Geometrical and dimensional characteristics			
Space envelope	7.5.1	X	-
Dimensions	7.5.2	X	X
FUNCTIONAL CHARACTERISTIC			
Characteristics “force as a function of displacement at constant velocity			
New condition	7.6.3.2	X	X
After test	7.6.3.3	X	-
Test program	Annex B**	X	

Table 7 – Tests required

(**) The Supplier shall perform fatigue resistance test according to Annex B of EN 13913, considering the normal load indicated on par. 3.1.1. of this TS.

If the test cycle results too long, the Supplier can propose an alternative test cycles to short the test time. As indicated on par. 4.4.1.1, the test proposed shall be approved by the Administration.

4.4.2 Supplier Technical Assistance

The requested, the Supplier shall provide all the technical assistance necessary for the first installation and commissioning of the equipment at TÜRASAŞ.

4.5 WARRANTY

4.5.1 Warranty Condition

Supplier shall guarantee the quality of products within the scope of this specification against malfunctions, failures and assembly and workmanship defects.

While the warranty period is limited to 30 months starting with the date of delivery of the products to TÜRASAŞ, it is 24 months starting with the commercial commissioning of the EMU set.

The responsibility of preventive maintenance on the normally used parts and of corrective maintenance in cases where it is evidently clear that failure cause is not the own malfunctions of the unit, shall belong to TÜRASAŞ.

Throughout the warranty period, following the notification by TÜRASAŞ of any malfunction, the Supplier shall respond to that malfunction within three (3) working days. The Supplier shall take all required actions to repair or replace related equipment.

The Supplier shall make available in Türkiye throughout the warranty period the required service facilities in order to respond to the possible malfunctions and an enough spare parts within this time period.

4.5.2 Systematic Fault / Epidemic Failure

If a failure covered by guarantee occurs during the guarantee period in more than 25% of the same parts/components, such failure shall be assumed as “epidemic failure”.

In addition, if mean time between failures (general average failure time) for the failures occurring in main components/parts used in all sets within annual periods during the guarantee term is shorter than guaranteed MDBF or MTBF value, such failure shall be deemed as an epidemic failure.

In case of confirmed systematic faults, proper investigations shall be done in order to define a proper technical solution or modification including spare parts modification or replacement.

4.6 ACCEPTANCE

4.6.1 Final Acceptance

After successful delivery of the all products under scope of supply and required documentation the final acceptance report shall be issued by TÜRASAŞ.

4.7 PACKAGING, LABELLING AND STORAGE

4.7.1 Packaging

System/equipment/components shall be delivered in suitable packages with adequate strength to be resistant against shocks and transportation damages including effects of dust, rain, snow, solar, wind etc. in the climatic conditions foreseen by the TŞ-01.139 General Technical Specification. Packing boxes shall be convenient for stacking one on another and shall allow easy lifting by fork-lift truck (where reasonably applicable) or travelling bridge-crane.

Following information shall be reported on the package (in a legible, non-erasable and non-removable mean):

- Name, address and registered logo of the manufacturer.
- Assembly part number and applicable tech. specification reference.
- Date of manufacturing and serial number (if applicable).
- Date and number of the contract.

Furthermore, if the content of a box consists of more than one component, a components list shall be added inside and outside of the box and each individual component shall be labelled. Determination of the content of these boxes shall be performed with the participations of TÜRASAŞ. Lists of the boxes shall be finalized after approval of the lists by TÜRASAŞ. A copy of each list shall be sent to TÜRASAŞ at the beginning of the shipment.

4.7.2 Labels/Marking

All marking of individual component shall be agreed to the requirements of their technical specification.

In any case the elastic elements shall be identified as a minimum by the following marks:

- Serial number;
- Data of manufacture;
- Supplier's part number (if any);
- Revision level;
- Stiffness Class.

Format and positioning of all labels/markings shall be subject to approval by TÜRASAŞ. Wherever possible, the position shall be such that labels can be viewed when the relevant part is installed within the vehicle.

Any company information, logo and brand etc. so located to products shall not be visible by passengers.

All labels shall be permanent and indelible.

4.7.3 Storage Conditions

The Supplier shall provide any useful information it is deemed necessary for the correct storage of the goods delivered.

4.7.4 Mounting and Handling

N/A

4.8 DOCUMENTATION TO BE SUPPLIED TO TÜRASAŞ

The following tables report the list of requested documents (with schedule) to be supplied to TÜRASAŞ.

Table 8 shows the documentation which shall be given by the Bidders in the offer phase.

Table 9 and **Table 10** show the documentation which shall be provided by the Supplier for the preliminary technical review and the detail technical review respectively.

Id.	Stage 1 -Offer Phase	Time Schedule	Language
1.1	The answers and the statements to the present technical specification	With offer	Turkish and English
1.2	Preliminary 3D or 2D models and installation drawings showing the main external space envelope		English
1.3	List of tests (routine, type, FAI, commissioning and homologation) that shall be performed on components and systems		English

Id.	Stage 1 -Offer Phase	Time Schedule	Language
1.4	IRIS certification of the Bidder (If the Bidder is an agency of the manufacturer, the Bidder shall show the manufacturer's certificate)		English
1.5	Minimum CL2 class certification according to EN 15085-2 (If the Bidder is an agency of the manufacturer, the Bidder shall show the manufacturer's or manufacturer's sub-supplier's certificate)		English
1.6	List of special tools and test equipment with their prices (If not submitted, it is interpreted that no special tool and equipment are needed)		Turkish and English
1.7	Design schedule, in line with project milestones		Turkish and English
1.8	Detailed price list (should include at least the price of the component, test, engineering, training, RAMS, etc.)		Turkish and English

Table 8 – Stage 1 Offer Phase: list of requested documents and due date

Id.	Stage 2 - Preliminary Review	Time Schedule	Language
2.1	First level drawings with weight and centre of gravity indications in 3D and 2D formats	Within one month after signing the contract	English
2.2	Certificates of the fire smoke behaviour of non-metal materials		English

Table 9 – Stage 2 list of requested documents and due date

Id.	Stage 3 - Detail Review	Time Schedule	Language
3.1	Definitive drawings with weight and centre of gravity indications in 3D and 2D format.	Within one month After FAI	English
3.2	All the technical documentation and information requested during the project (including final version of documents of previous stages)		Turkish and English
3.3	Reports of tests (routine, type, FAI, commissioning and homologation) performed on components and systems		English
3.4	RAMS and LCC documentation: see dedicated paragraphs		Turkish and English
3.5	User manuals		Turkish and English
3.6	Maintenance manuals		Turkish and English

Id.	Stage 3 - Detail Review	Time Schedule	Language
3.7	Calculations, tests and analysis report requested by TSI		Turkish and English

Table 10 – Stage 3 list of requested documents and due date

The Bidder shall review and confirm the above lists of documents for all the phases of the project. Any deviation shall be submitted to TÜRASAŞ for approval.

Notes:

- 3D models of all components shall be provided, shall be in “.stp” format and shall be complete with all elements, connection included.
- 2D drawings shall be provided in .dwg or dxf format (plus PDF).
- Other documents shall be provided in an editable format and in .pdf format.
- In the documentation, the Turkish version shall prevail in case of utilisation both Turkish and English languages.
- All documents in stage 1 shall be provided as hardcopy and softcopy in “CD” or “USB”

5 ANNEX

Annexed documents

GZ90.04.10.00004	Axlebox
------------------	---------

Reference documents

TŞ-01.139	General Technical Specification
GZ90.04.10.00006	Conical Rubber Spring
TD-GZ.04.0146	RAMS Analysis- Requirements for Primary Suspension
GZ10.04.00.00000	Motor Bogie Layout
GZ11.04.00.00000	Trailer Bogie Layout

END of DOCUMENT

L. U.C.