적 용 규 격 SPECIFICATION APPLIED	

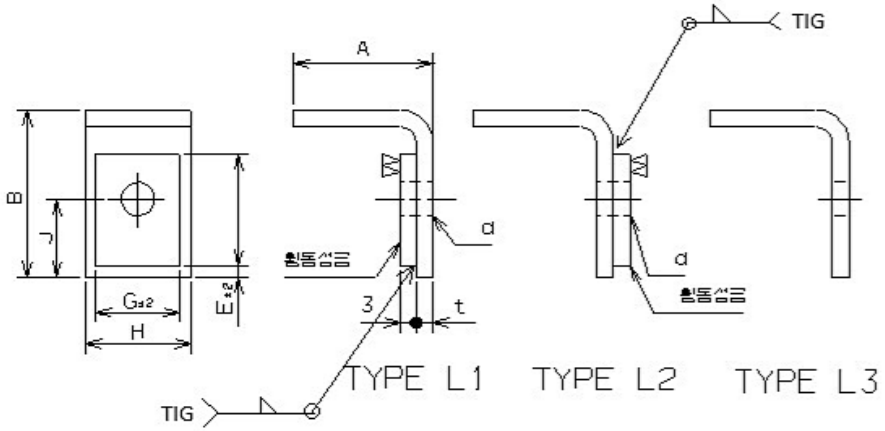

TYPE	DWG NO.	NO.	DIMENSION t	H	A	B	C	E	F	G	J	d	USED WIRE
L1	CP709001-400	1	3	19	25	30		2	20	15	14	6	2.3-5(L).5-5(L)
	CP709001-401	2	3	25	25	40		3	25	20	20	7	3.5(H).5-5(H).8(H)부분 조립 우)
	CP709001-402	3	4	32	30	55		3	35	28	25	9	8(H)부분 조립 우).14.22
	CP709001-403	4	4	50	30	70		5	50	40	35	11	38~80
	CP709001-404	5	6	65	35	90		5	65	55	45	14	100~150
	CP709001-405	6	9	75	45	105		5	80	65	55	14	200~250
L2	CP709001-406	1	3	19	25	30		2	20	15	14	6	2.3.5(L).5.5(L)
	CP709001-407	2	3	25	25	40		3	25	20	20	7	3.5(H).5.5(H).8(H)부분 조립 우)
	CP709001-408	3	4	32	30	55		3	35	28	25	9	8(H)부분 조립 우).14.22
	CP709001-409	4	4	50	30	70		5	50	40	35	11	38~80
	CP709001-410	5	6	65	35	90		5	65	55	45	14	100~150
	CP709001-411	6	9	75	45	105		5	80	65	55	14	200~250
L3	CP709001-412	1	3	19	25	30		2	20	15	14	6	2.3.5(L).5.5(L)
	CP709001-413	2	3	25	25	40		3	25	20	20	7	3.5(H).5.5(H).8(H)부분 조립 우)
	CP709001-414	3	4	32	30	55		3	35	28	25	9	8(H)부분 조립 우).14.22
	CP709001-415	4	4	50	30	70		5	50	40	35	11	38~80
	CP709001-416	5	6	65	35	90		5	65	55	45	14	100~150
	CP709001-417	6	9	75	45	105		5	80	65	55	14	200~250

두께 THICKNESS			
	~40	2	4
	~30	2	3
	~10	1	1.5
	< 3	0.5	1
길이 LENGTH	~3150	-	7
	~1600	4	5
	~800	3	4
	~400	2	3
	~200	1.5	2
	~100	1	1.5
등급 GRADE		A	B
주물 주강품 구분·기공 CASTING (±)			
~20M	8	14	24
~15M	7	12	21
~12M	6	10	18
~8M	5	8	14
~4M	4	6	11
~2M	3	4	8
~1M	2	3	6
~315	1	2	4
~120	1	2	3
~30	1	1	1
등급 GRADE	A	B	C
용접 구조물 WELDING (±)			
~20M	-	6.0	8.0
~15M	-	5.0	7.0
~12M	-	4.0	6.0
~8M	-	3.0	5.0
~4M	0.8	2.0	4.0
~2M	0.5	1.2	3.0
~1M	0.3	0.8	2.0
~315	0.2	0.5	1.2
~120	0.15	0.3	0.8
~30	0.1	0.2	0.5
3~6	0.05	0.1	0.2
등급 GRADE	A	B	C
기계 가공품 MACHINING (±)			

NOTE

1. 본도는 단자대 A형임.
2. 재료는 SUS304 및 황동성금
3. 계산상 규격치를 사용치 못하는 부분의 변경 할 치수를 다음 항 "표창방법"의 다음에 ( )를 붙여 지시함.
4. A형 접지 단자대의 표창방법은 다음과 같다.
   형식-TYPE-NO.(지점치수)
   예)A-L2-2 (d=M6). A-Z1-4(A=4D. C=50)
5. 적용 전선중 (L)는 저압용 (H)는 고압용을 표시

1. This drawing is to inform of Type "A" of Earth Terminal.

2. The material is SUS 304 and copper bronze metal.

3. if any problem not to use the dimension in table. please note with brackets " ( ) "

4. Please be noted the description of Type "A" of Earth Terminal as below

Example : A-L2-2 (d=M6). A-Z1-4 (A=4D . C=50)

5. The word (L) means Cable for low voltage and (H) means Cable for high voltage.

REV A: Kaynak yöntemi ve gösterimi eklenmiştir.(13.06.2024)

품번 NO.	부품 번호 PART NO.	품 명 DESCRIPTION	재 질 MATERIAL	수량 Q'TY	중량 W.T	비 고 REMARKS

승인 APP	G H YEOM 2004.08.31	제작 MAT'L ASSY	명 칭 TITLE: EARTH TERMINAL AA-TYPE, L-TYPE
검도 CHK	H.G.RYU 2004 08 31	중량 G.W 0.00	
설계 DGN	M. H. KIM 2002. 11. 29	일반공차 MC WD CT	도면 번호 DRG. NO M5 CP709001-400 Ver. 00 Rev. A
제도 DRG		SIZE A3	SCALE N/S 매수 SHEET 1 of 1

규격치없은 일반공차표 GENERAL TOLERANCE	기 호 MARK	일 자 DATE	변 경 내 역 DETAIL OF REVISION(E.C ZONE)	설변번호 E C NO	설계 DGN	검도 CHK	승인 APP

참고번호 REF. NO. RTE00105-400

HYUNDAI Rotem 현대로템주식회사

본 도면은 당사 재산으로서 허가없이 복제 / 배포 금지함. PROPERTY OF ISSUING ENTITY. CANNOT BE DISTRIBUTED OR REPRODUCED WITHOUT AUTHORIZATION