


6	
적용규격 SPECIFICATION APPLIED	



THICKNESS mm	40	2	4		
	30	2	3		
	10	1	1.5		
	< 3	0.5	1		
	315	-	7		
LENGTH	1600	4	5		
	800	3	4		
	400	2	3		
	200	1.5	2		
	100	1	1.5		
등급 GRADE		A	B		
주철 주조물 CASTING	20M	8	14	24	
	15M	7	12	21	
	12M	6	10	18	
	8M	5	8	14	
	4M	4	6	11	
	2M	3	4	8	
	1M	2	3	6	
	315	1	2	4	
	120	1	2	3	
	30	1	1	1	
등급 GRADE		A	B	C	
용접 구조물 WELDING	20M	-	6.0	8.0	
	15M	-	5.0	7.0	
	12M	-	4.0	6.0	
	8M	-	3.0	5.0	
	4M	0.8	2.0	4.0	
	2M	0.5	1.5	3.0	
	1M	0.3	0.8	2.0	
	315	0.2	0.5	1.2	
120	15.0	3.0	0.8		
	30	0.1	0.2	0.5	
	3	6	0.05	0.1	0.2
	등급 GRADE		A	B	C
	기계 가공물 MACHINING				

NOTE

1. REMOVE ALL SHARP EDGES AND BURRS.
2. INNER BENDING RADIUS : THICKNESS 3.2 = R3.2

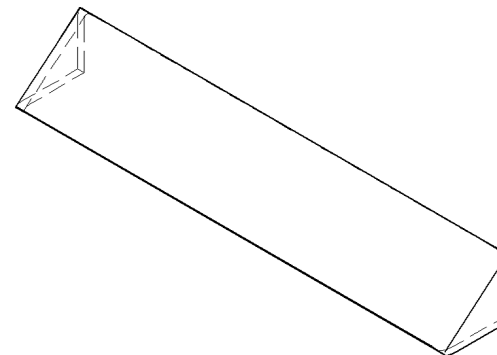

ISOMETRIC VIEW

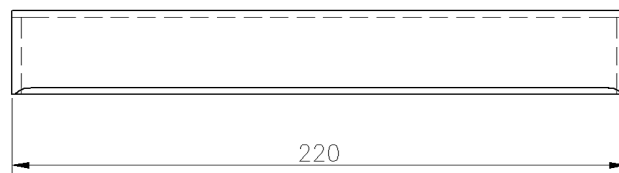

품번 NO.		부품 번호 PART NO.		품 명 DESCRIPTION			재 질 MATERIAL		Q'TY	중량 W.T	비 고 REMARKS			
승인 APP	H.G.RYU 2012.06.04		재질 MAT'L SS400		명 칭 TITLE	BRACKET								
검도 CHK	H.H.LEE 2012.06.04		총중량 G.W 0.26 Kg											
설계 DGN	M.B.YANG 2012.06.04		일 반 공 차			도면 번호 DRG. NO	MS	RMM30020CVO				Ver.	00	RNO1001
			MC	WD	CT							Rev.	--	
제도 DRG			B			SCALE 1/2		매수 SHEET 1 of 1					RMM-	
			SIZE A3		HYUNDAI Rotem 현대로템주식회사								년-PRJT	
		참고번호 REF. NO.												