


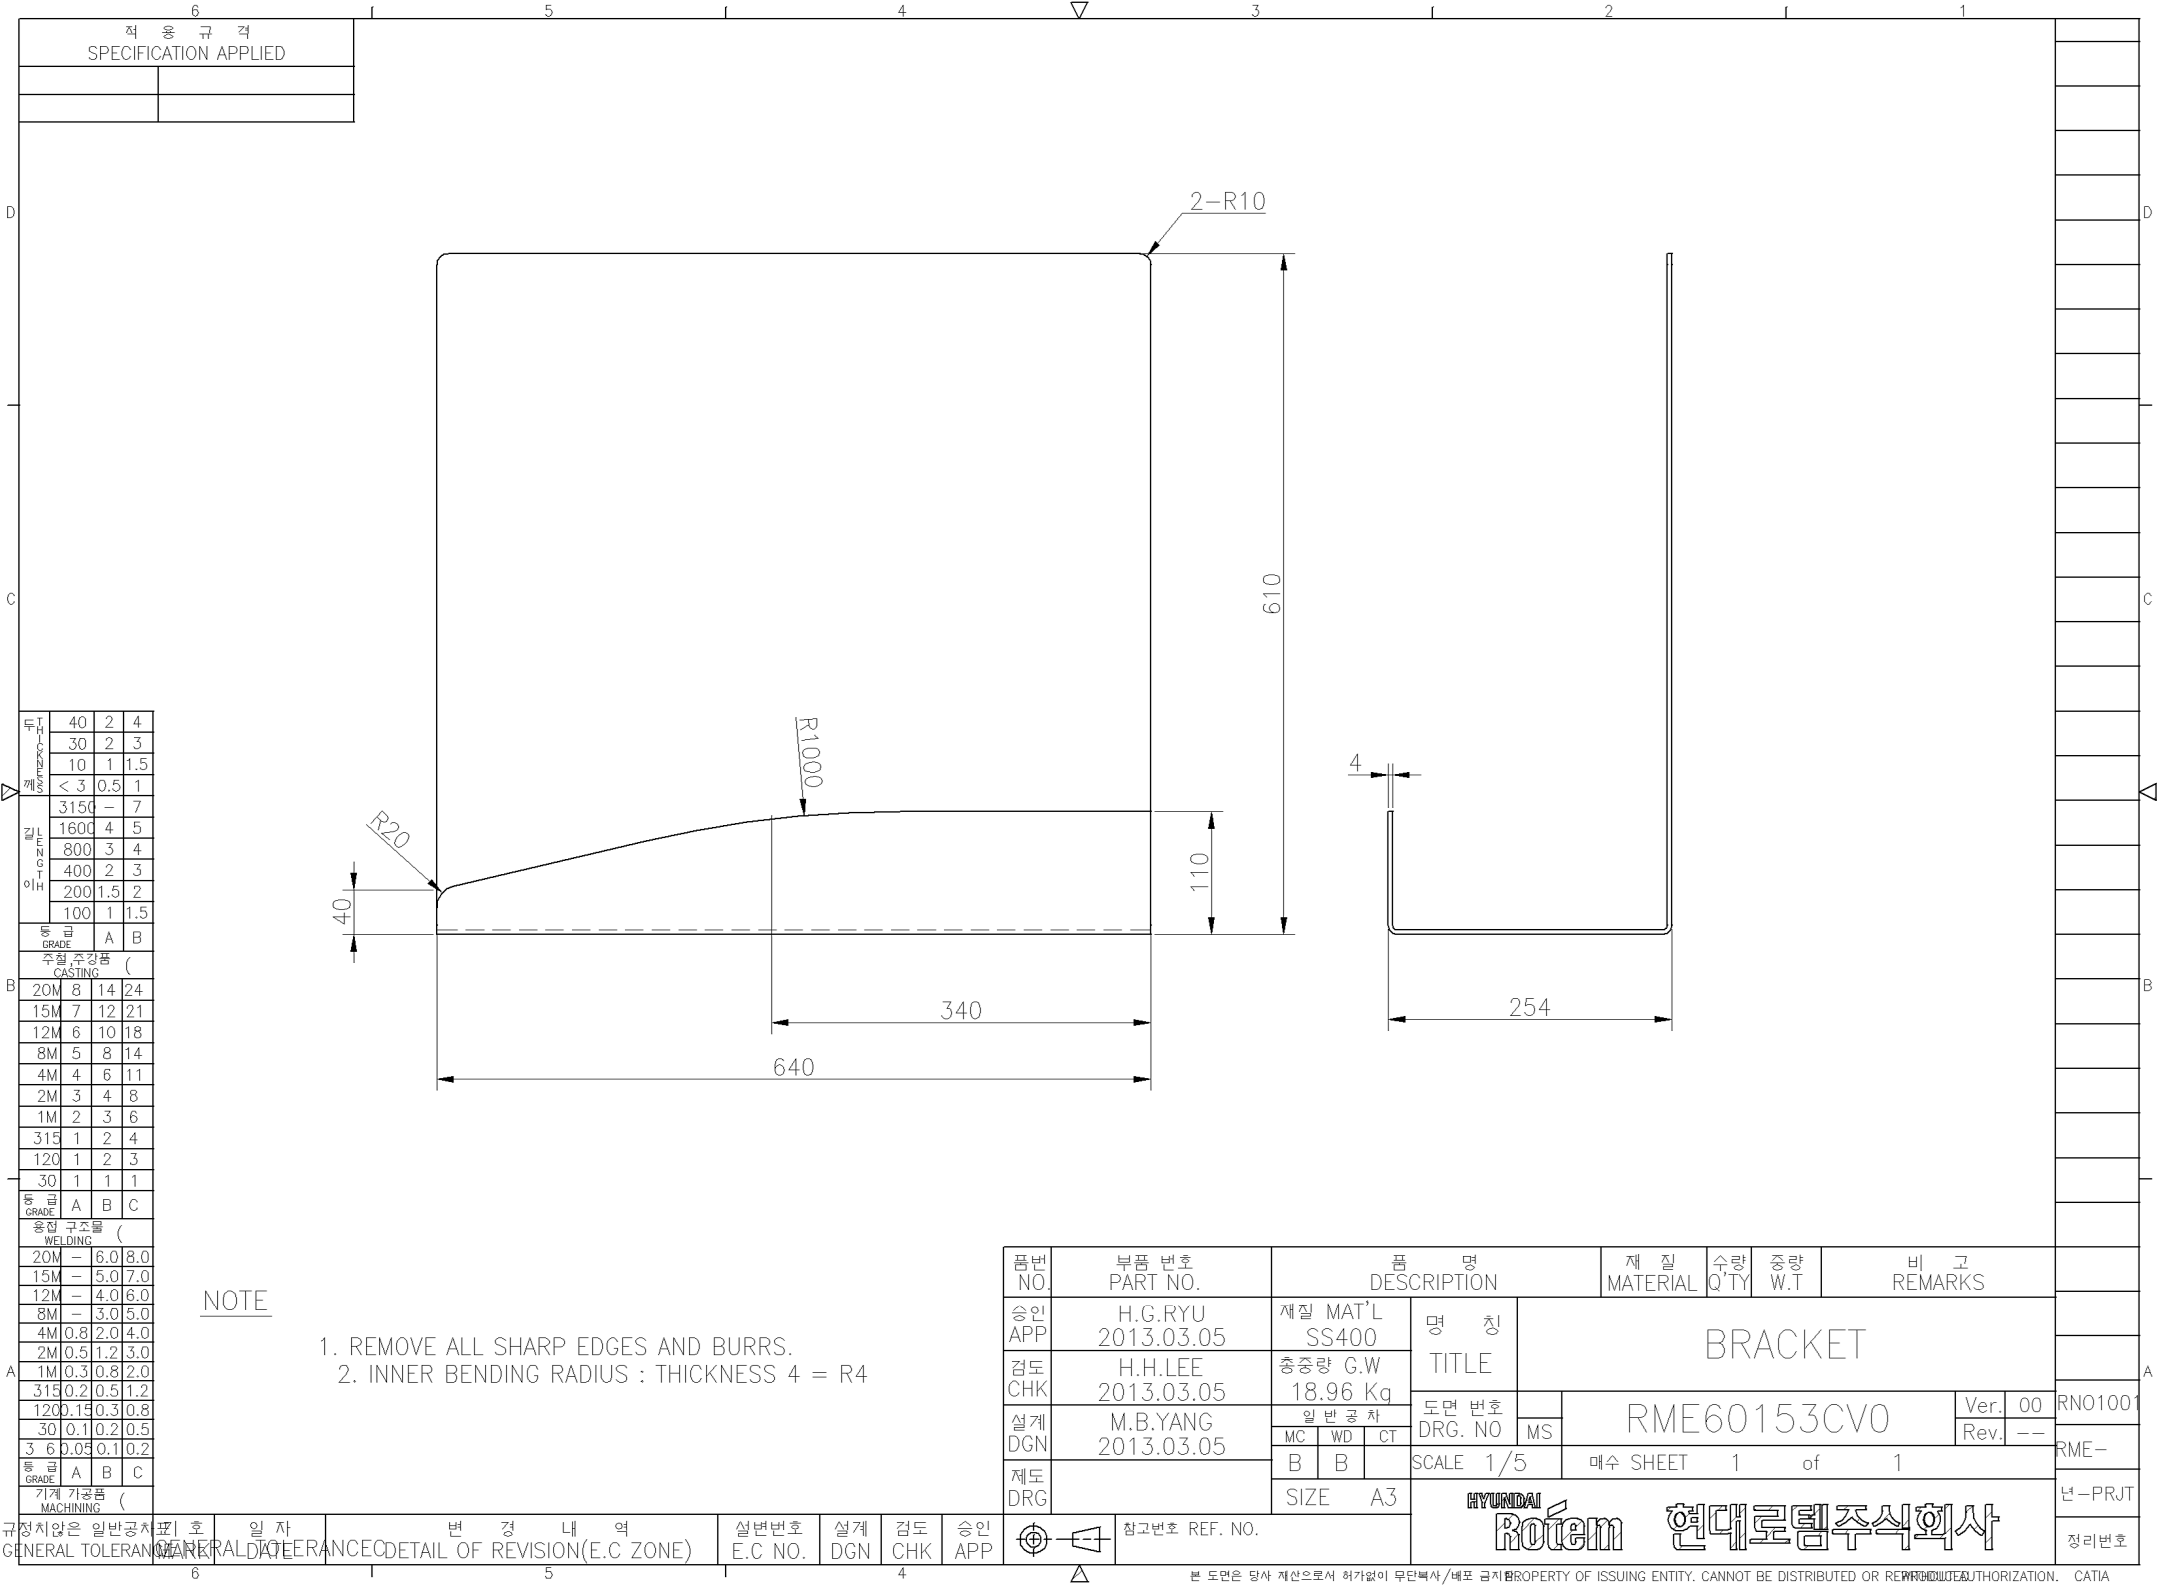

적용규격 SPECIFICATION APPLIED			

두께 THICKNESS	40	2	4
	30	2	3
	10	1	1.5
	< 3	0.5	1
길이 LENGTH	3150	—	7
	1600	4	5
	800	3	4
	400	2	3
이하	200	1.5	2
	100	1	1.5
등급 GRADE	A	B	
주철, 주강품 (CASTING)			
20M	8	14	24
15M	7	12	21
12M	6	10	18
8M	5	8	14
4M	4	6	11
2M	3	4	8
1M	2	3	6
315	1	2	4
120	1	2	3
30	1	1	1
등급 GRADE	A	B	C
용접 구조물 (WELDING)			
20M	—	6.0	8.0
15M	—	5.0	7.0
12M	—	4.0	6.0
8M	—	3.0	5.0
4M	0.8	2.0	4.0
2M	0.5	1.2	3.0
1M	0.3	0.8	2.0
315	0.2	0.5	1.2
120	0.15	0.3	0.8
30	0.1	0.2	0.5
3	0.05	0.1	0.2
등급 GRADE	A	B	C
기계 가공품 (MACHINING)			

NOTE

1. REMOVE ALL SHARP EDGES AND BURRS.
2. INNER BENDING RADIUS : THICKNESS 4 = R4