BRUNING 44:61

ENGINEERING STANDARDS SECTION


GENERAL MOTORS CORPORATION - G. M. TECHNICAL CENTER - WARREN, MICHIGAN

N 116436

DATE	SYM	REVISION RECORD	AUTHORITY	DR	CHK
2-8-72	F	REDRAWN & REVISED		SS	

NOTES:

1. NOSE DIA MUST BE CONCENTRIC WITH THD PD WITHIN .010 TIR.
2. COMMERCIAL BAR STOCK TOLERANCES SHALL APPLY.
3. OFFSET NOT TO EXCEED .015 AT MEETING POINT OF PASSAGES MACHINED FROM OPPOSITE ENDS.
4. DIA OF BODY BEYOND ROLLED NPTF THD MAY BE .502 MIN.

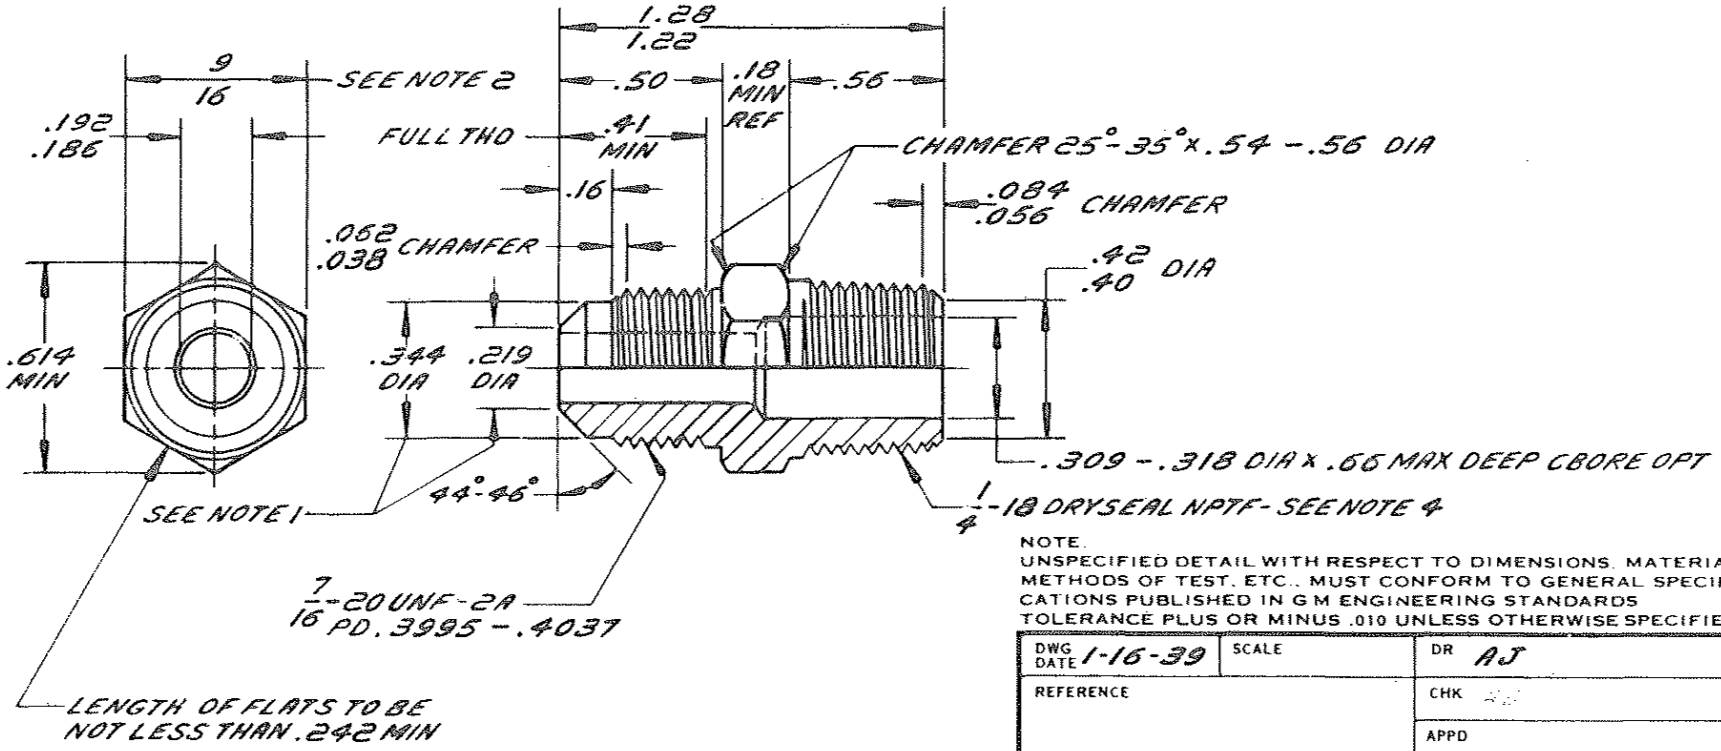

NOTE.
UNSPECIFIED DETAIL WITH RESPECT TO DIMENSIONS, MATERIAL METHODS OF TEST, ETC., MUST CONFORM TO GENERAL SPECIFICATIONS PUBLISHED IN G M ENGINEERING STANDARDS
TOLERANCE PLUS OR MINUS .010 UNLESS OTHERWISE SPECIFIED

DWG DATE 1-16-39	SCALE	DR AJ
REFERENCE		CHK
		APPD

MATERIAL SPEC
SAE CA360 (HALF HARD), SAE CA345 OR SAE CA350 BRASS

NAME
CONNECTOR - 45° FLARED TUBE

Yst No	Sita No
1718	95

DESCRIPTION 1/4 (1/4 NPTF)

FINISH
PLAIN

PART NO.
116436