BRUNING 44161•


ENGINEERING STANDARDS SECTION

GENERAL MOTORS CORPORATION - G. M. TECHNICAL CENTER - WARREN, MICHIGAN

NO. **118748**

DATE	SYM	REVISION RECORD	AUTHORITY	DR	CHK
6-7-71	F	REDRAWN & REVISED		RD	

NOTES:
1. NOSE DIA MUST BE CONCENTRIC WITH THD PD WITHIN .010 TIR.
2. COMMERCIAL BAR STOCK TOLERANCES SHALL APPLY.
3. OFFSET NOT TO EXCEED .015 AT MEETING POINT OF PASSAGES MACHINED FROM OPPOSITE ENDS.
4. DIA OF BODY BEYOND ROLLED NPTF THD MAY BE .380 MIN.

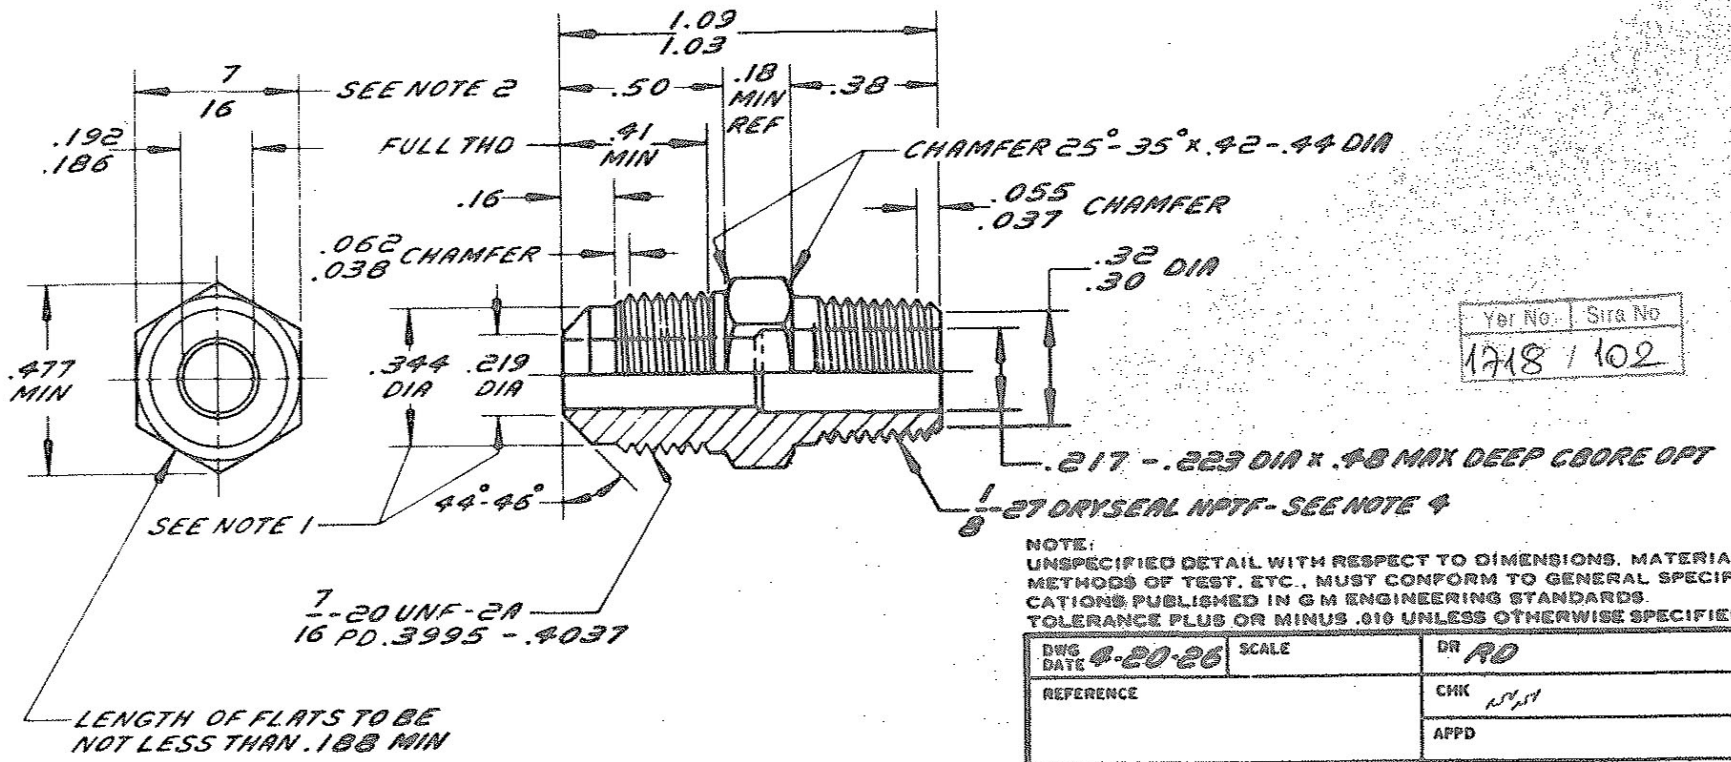

Yer No. 1718 | Sira No 102

NOTE:
UNSPECIFIED DETAIL WITH RESPECT TO DIMENSIONS, MATERIAL, METHODS OF TEST, ETC., MUST CONFORM TO GENERAL SPECIFICATIONS PUBLISHED IN GM ENGINEERING STANDARDS.
TOLERANCE PLUS OR MINUS .010 UNLESS OTHERWISE SPECIFIED.

DWG DATE 6-20-26	SCALE	DR RD
REFERENCE		CHK
		APPD

MATERIAL SPEC
SAE CA360 (HALF HARD), SAE CA345 OR SAE CA350 BRASS

NAME
CONNECTOR - 45° FLARED TUBE

DESCRIPTION 1/8"

FINISH PLAIN

PART NO. **118748**