
DIESEL EQUIPMENT DIVISION
GENERAL MOTORS CORPORATION, GRAND RAPIDS, MICHIGAN

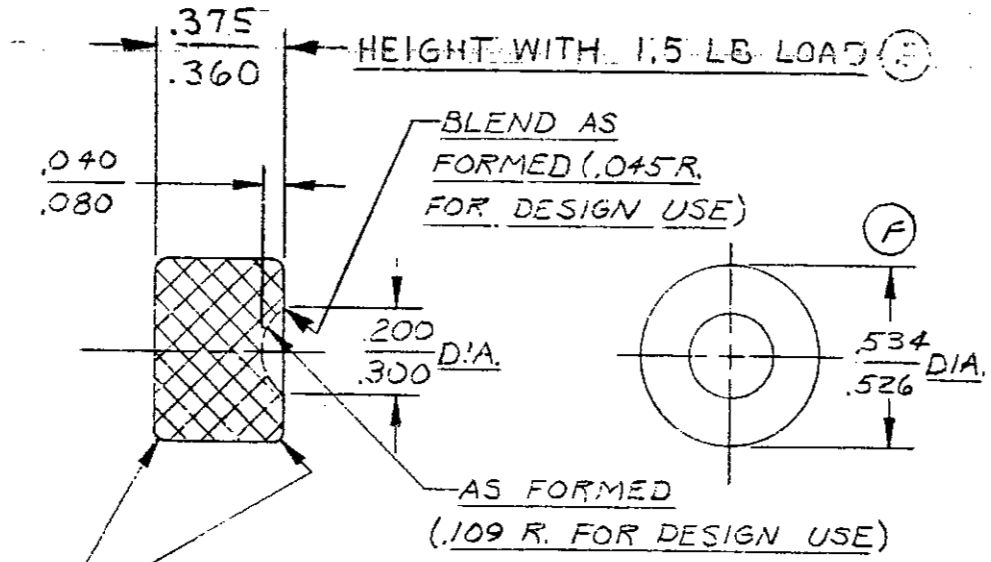

EDGE MAY EXTEND .003 MAX. BEYOND FLAT SURFACE - .040 MAX. BREAK IS PERMISSIBLE.

EDGE MAY EXTEND .010 MAX. BEYOND FLAT SURFACE - .040 MAX. BREAK IS PERMISSIBLE.

MUST BE CLEAN AND FREE FROM ALL WIRE ENDS AND LOOSE PARTICLES.

ENGINEERING APPROVAL OF SOURCE REQUIRED.

FLOW MUST BE 5000 C.C. TO 7500 C.C. PER MIN. THRU FIXTURE E-2404-B WITH FUEL '34 SUV AT 100°F.) AT 25 LBS. PER SQ. IN. AND 90°F.

.0045 DIA. WIRE

WEIGHT .145 - .170 OZS.

G

1706 311

5228013

DATE	SYM.	REVISION RECORD	AUTHORITY	DR.	CK.
1-10-62	D	REVISED AND REDRAWN	EB-WA-LM		
5-14-75	E	NOTE ADDED			
	F	WAS .526-.531 DIA.			
	G	TYPE 316 ADDED	EB BB	SF	ajh

DO NOT SCALE PRINT — REPORT ERRORS
UNLESS OTHERWISE SPECIFIED THE FOLLOWING APPLY:
ALLOWABLE VARIATION IN DECIMAL FINISHED DIMENSIONS ± .010
TOLERANCE ON ANGLES ± 1°

DWG. DATE 12-16-48	SCALE 2 TIMES	DR. VAN SLOOTEN
FIRST USED		CK. STOWITTS
		APPR.
REFERENCE		APPR.
		APPR.

MATERIAL SPEC. STAINLESS STEEL TYPE 304, 316

NAME FILTER-INJECTOR

PART NO. 5228013 A

2 62

DIESEL EQUIPMENT