
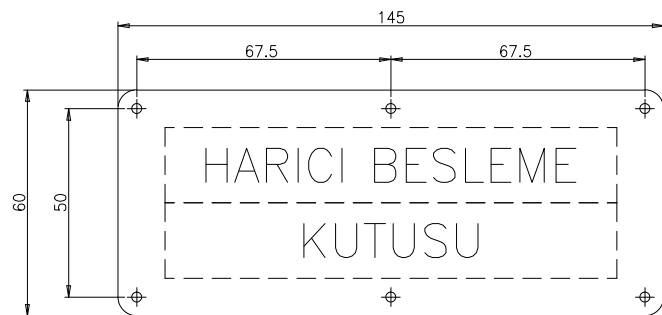
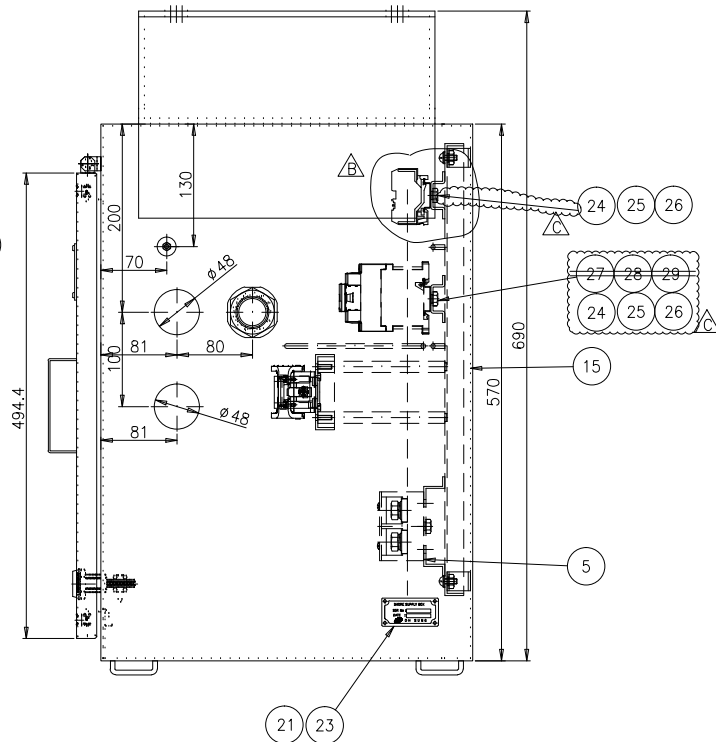
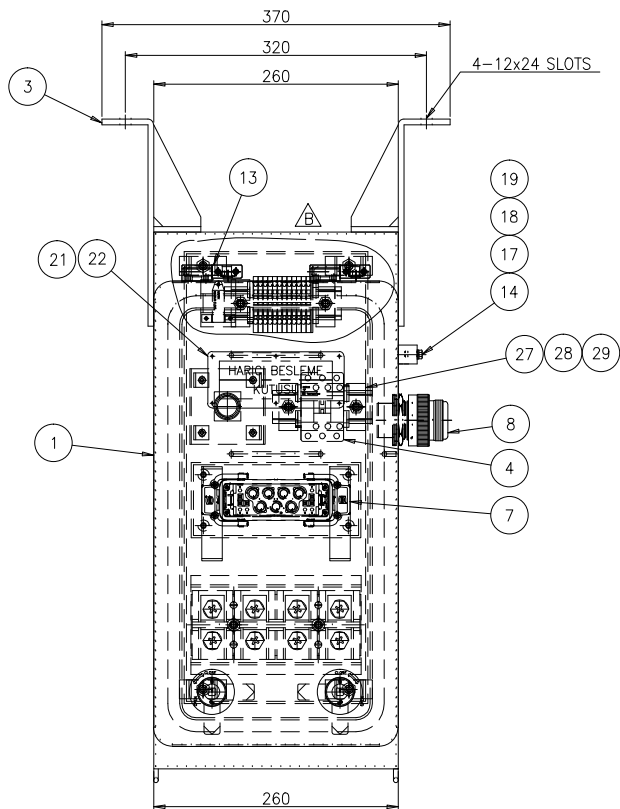



[illegible]

NAME PLATE

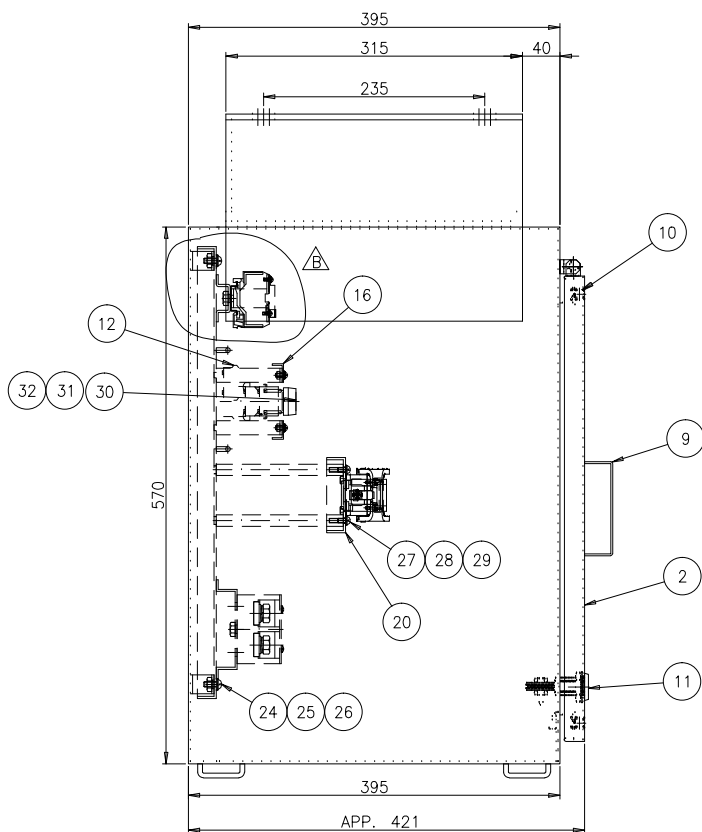

1. To be painted according to the specification (~~REDD100459~~ REDD101288_REDD101461) 
2. Name plate should be fixed with rivet and waterproofed.
3. Do not paint on the earth pad.
4. Protection Degree (IEC60529) : IPX5
5. Earth pad Should be attached Earth symbol sticker

8. Insulation resistance test(IEC 60077-1)

- To be performed before & after the Dielectric test
- To measure that the insulation resistance between terminal and earth terminal is to be 10M_Ω or more

- To be performed after the insulation resistance test
- The value of the test voltage the time of application of which is fixed at 1minute in all cases are defined below

-DC 24V : AC 750V

MALE PLUG		Remarks
PIN(MALE)	09 38 012 2651	HARTING
HOODS	19 30 024 0428	

C X8	2015.09.03	ERROR CORRECTION	RSD1402-U125	WKSJN	JUMBAE	HGRYU	CHK	2009.06.04	36.8 35.4kg	도면 번호	REB92001AN0			Ver. 00	3D5101
B X13	2010.01.12	CHANGED THE LOCATION OF T/B AND THERMOSTAT	3D5101-U096	WKSJN	HYJANG	HGRYU	설계 DGN	M.K.SON	2009.06.04	DRG. NO	MS	Rev. -C			
A X2	2009.12.08	TYPE CORRECTED	3D5101-U067	WKSJN	HYJANG	HGRYU	개도 DRG	H.J.JEONG	2009.06.04	SCALE	1/4	매수 SHEET	1 of 1		
기호 MARK	일치 DATE	변경내역 DETAIL OF REVISION(E.C ZONE)	설비번호 E.C NO.	설계 DGN	검도 CHK	승인 APP	참고도 REF. NO.	SIZE A1			HYUNDAI Rotem 현대로템주식회사			년-PRJT	
정리번호															