

Nuts for C-Slot

d1 L	M6	M8	M10	M12	M16
20	101	106	111	116	
30	102	107	112	117	122
40	103	108	113	118	123
50	104	109	114	119	124
60	105	110	115	120	125

d1	M6	M8	M10	M12	M16
b	30	30	30	30	30
h	15	15	15	15	15
k	1 x 45°	1 x 45°	1 x 45°	1 x 45°	1 x 45°

For "Dash Number 100" refer only to values: "b" , "h" and "k"

** If the treatment is "B" the thickness must be 120µm


NOT PREFERRED

To create the complete part number for normalized item refer to the following table									
		TUVASAS Standard							
		Fix	.	Main Group	Subgroup	-	Dash Number	Material *	Treatment *
Generic		SP	.	XX	XXX	-	XXX	X	X
Example		SP	.	01	001	-	111	J	B**

* For material and treatment refer to standard SP.00.001

Standard Reference	Type 01	Issue Date	05/11/2018
TUVASAS Standard	SP.02013	Rev. Date	27/11/2018
Nuts for C-Slot		Rev. 00	Sheet 1 Of 5
		-	-

All rights reserved. No parts of this document may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm without permission in write form.

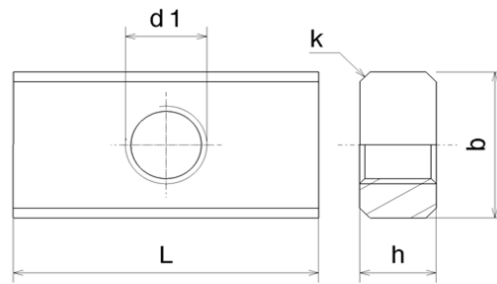

Nuts for C-Slot

d1 \ L	M6	M8	M10
20	201	206	211
30	202	207	212
40	203	208	213
50	204	209	214
60	205	210	215

d1	M6	M8	M10
b	35	35	35
h	10	10	10
k	1 x 45°	1 x 45°	1 x 45°

For "Dash Number 200" refer only to values: "b", "h" and "k"

** If the treatment is "B" the thickness must be 120µm




To create the complete part number for normalized item refer to the following table									
TUVASAS Standard									
	Fix	.	Main Group	Subgroup	-	Dash Number	Material *	Treatment *	
Generic	SP	.	XX	XXX	-	XXX	X	X	
Example	SP	.	01	001	-	111	J	B**	

* For material and treatment refer to standard SP.00.001

Standard Reference	Type 02	Issue Date	05/11/2018
TUVASAS Standard	SP.02013	Rev. Date	27/11/2018
Nuts for C-Slot		Rev. 00	Sheet 2 Of 5
		-	-

All rights reserved. No parts of this document may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and micro film without permission in write form.

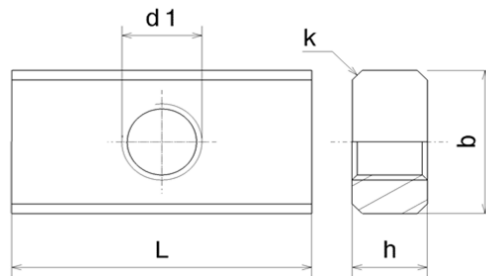

Nuts for C-Slot

d1 \ L	M6	M8	M10
20	301	306	311
30	302	307	312
40	303	308	313
50	304	309	314
60	305	310	315

d1	M6	M8	M10
b	22	22	22
h	10	10	10
k	1 x 45°	1 x 45°	1 x 45°

For "Dash Number 300" refer only to values: "b", "h" and "k"

** If the treatment is "B" the thickness must be 120µm




To create the complete part number for normalized item refer to the following table									
TUVASAS Standard									
	Fix	.	Main Group	Subgroup	-	Dash Number	Material *	Treatment *	
Generic	SP	.	XX	XXX	-	XXX	X	X	
Example	SP	.	01	001	-	111	J	B**	

* For material and treatment refer to standard SP.00.001

Standard Reference	Type 03	Issue Date	05/11/2018
TUVASAS Standard	SP.02013	Rev. Date	27/11/2018
Nuts for C-Slot		Rev. 00	Sheet 3 Of 5
		-	-

All rights reserved. No parts of this document may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and micro film without permission in write form.

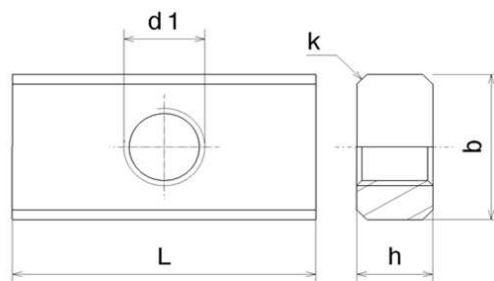


Nuts for C-Slot

d1 L	M6	M8
20	401	406
30	402	407
40	403	408
50	404	409
60	405	410

d1	M6	M8
b	27	27
h	10	10
k	1 x 45°	1 x 45°

For "Dash Number 400" refer only to values: "b" , "h" and "k"

** If the treatment is "B" the thickness must be 120µm




To create the complete part number for normalized item refer to the following table									
TUVASAS Standard									
	Fix	.	Main Group	Subgroup	-	Dash Number	Material *	Treatment *	
Generic	SP	.	XX	XXX	-	XXX	X	X	
Example	SP	.	01	001	-	111	J	B**	

* For material and treatment refer to standard SP.00.001

Standard Reference	Type 04	Issue Date	05/11/2018
TUVASAS Standard	SP.02013	Rev. Date	27/11/2018
Nuts for C-Slot		Rev. 00	Sheet 4 Of 5
		-	-

All rights reserved. No parts of this document may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and micro film without permission in write form.

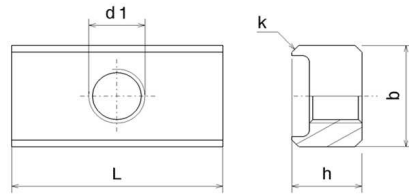

Nuts for C-Slot

d1 \ L	M6	M8	M10	M12	M16
20	501	506	511	516	
30	502	507	512	517	522
40	503	508	513	518	523
50	504	509	514	519	524
60	505	510	515	520	525

d1	M6	M8	M10	M12	M16
b	30	30	30	30	30
h	20	20	20	20	20
k	1 x 45°	1 x 45°	1 x 45°	1 x 45°	1 x 45°

For "Dash Number 500" refer only to values: "b", "h" and "k"

** If the treatment is "B" the thickness must be 120µm

 NOT PREFERRED

To create the complete part number for normalized item refer to the following table									
TUVASAS Standard									
	Fix	.	Main Group	Subgroup	-	Dash Number	Material *	Treatment *	
Generic	SP	.	XX	XXX	-	XXX	X	X	
Example	SP	.	01	001	-	111	J	B**	

* For material and treatment refer to standard SP.00.001

Standard Reference	Type 05	Issue Date	05/11/2018
TUVASAS Standard	SP.02013	Rev. Date	27/11/2018
Nuts for C-Slot		Rev. 00	Sheet 5 Of 5
		-	-

All rights reserved. No parts of this document may be reproduced or utilized in any form or by any means, electronic or mechanical, including photo copying and microfilm without permission in write form.