


THICKNESS 厚さ	~ 40	2	4
	~ 30	2	3
	~ 10	1	1.5
	< 3	0.5	1
	~ 3150	-	7
	~ 1600	4	5
	~ 800	3	4
	~ 400	2	3
	~ 200	1.5	2
	~ 100	1	1.5
LENGTH 寸法	品名 GRADE	A	B
	公差, 寸法公差 CASTING (±)		
	~ 20M	8	14 24
	~ 15M	7	12 21
	~ 12M	6	10 18
	~ 8M	5	8 14
	~ 4M	4	6 11
	~ 2M	3	4 8
	~ 1M	2	3 6
	~ 315	1	2 4
GRADE 品名	~ 120	1	2 3
	~ 30	1	1 1
	品名 GRADE	A	B C
	公差, 寸法公差 WELDING (±)		
	~ 20M	-	6.0 8.0
	~ 15M	-	5.0 7.0
	~ 12M	-	4.0 6.0
	~ 8M	-	3.0 5.0
	~ 4M	0.8	2.0 4.0
	~ 2M	0.5	1.2 3.0
GENERAL TOLERANCE 公差, 寸法公差	~ 1M	0.3	0.8 2.0
	~ 315	0.2	0.5 1.2
	~ 120	0.15	0.3 0.8
	~ 30	0.1	0.2 0.5
	3~6	0.05	0.1 0.2
	品名 GRADE	A	B C
	公差, 寸法公差 MACHINING (±)		
	公差, 寸法公差 MACHINING (±)		
	公差, 寸法公差 MACHINING (±)		
	公差, 寸法公差 MACHINING (±)		

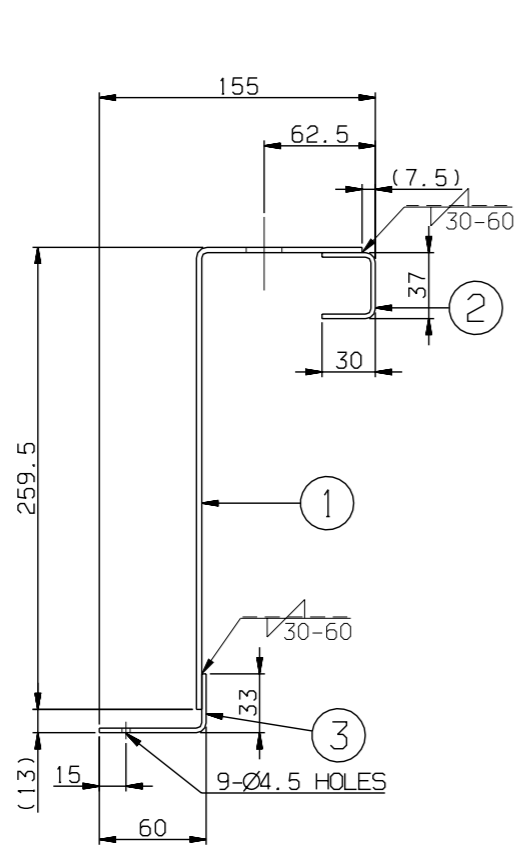

Technical drawing of a mechanical part, showing three views: front, top, and side. The drawing includes dimensions and a detail view of the central hole.

**Front View:** A rectangular block with a width of 100 and a height of 259.5.


**Top View:** A circular base with a diameter of 50. A central hole is shown with a diameter of 38. A detail view of the hole is provided, showing a radius of R6 and a depth of 14.

**Side View:** A profile view showing a radius of R3 and a height of 93.

Technical drawing of a mechanical assembly. The drawing shows a cross-section of a component with a central vertical shaft and a horizontal flange. Dimensions are indicated: 25 and 30 for horizontal distances, and 15 for a vertical distance. Numbered callouts (1 through 7) point to specific features: 1 points to the central shaft, 2 points to the horizontal flange, 3 points to a bolt, 4 points to a nut, 5 points to a washer, 6 points to a seal, and 7 points to a cap screw.

NOTE

1. THE SHARP EDGE SHALL BE REMOVED.
2. THE STRAIGHTNESS OF PART 2 AND 3 SHALL BE LESS THAN  $\pm 1\text{MM}$

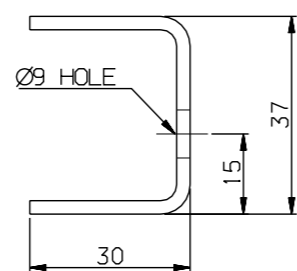

Technical drawing of a mechanical part showing front and side views with dimensions.


**Front View (Left):**


- Overall width: 100
- Overall height: 37
- Left hole: Diameter 20, centered vertically.
- Right hole: Diameter 10, centered vertically.
- Distance between hole centers: 60
- Distance from left edge to right hole center: 80
- Radius of the right hole: R5

**Side View (Right):**

- Overall width: 25
- Overall height: 37
- Distance from top edge to hole center: 15
- Radius of the hole: R2.5
- Distance from right edge to hole center: 2.5

7	RS60401-008S	NUT, HEX	SUS304	1		M8	
6	RS60801-007S	WASHER, SPRING	SUS304	1		M8	
5	RS60104-207S	BOLT, HEX HEAD, SOCKET	SUS304	1		M8X25	
4	RFP80015AN0-004	CONNECTOR	SUS304	1		T2.5	
3	RFP80015AN0-003	FRAME	SUS304	1		LA T2.5X33X60X3180	
2	RFP80015AN0-002	FRAME	SUS304	1		LC T2.5X37X30X3180	
1	RFP80015AN0-001	BRACKET	SUS304	5		T3	
품번 NO.	부품 번호 PART NO.	품 명 DESCRIPTION	재 질 MATERIAL	수량 Q'TY	중량 W.T	비 고 REMARKS	

승인 APP	H.G.RYU 2009.02.05	재질 MAT'L	명칭 TITLE										FRAME, REMOVAL ASSY, TYPE L																	
검도 CHK	H.S.KIM 2009.02.05	총품량 G.W	도면 번호 DRG. NO										RFP80015AN0										Ver.	00						
설계 DGN	Y.D.KIM 2009.02.04	일련공차			MC	WD	CT	MS	SCALE 1/10										매수 SHEET 1 of 1										Rev.	--
		B	B	B																										
제도 DRG	S.H.SONG 2009.02.04	SIZE A2			HYUNDAI Rotem 현대로템주식회사																									
		참고번호 REF. NO.		FPP08385																										

기 호 MARK	일 자 DATE	비 고 내 역 DETAIL OF REVISION(E.C ZONE)	설 번 번호 E.C NO.	설 계 DGN	검 도 CHK	승 인 APP	
----------------	----------------	--	-------------------------	---------------	---------------	---------------	---