


TŞ-F25.0005_D0000

Ek-2: Titreşim Önleyici Esnek Bağlantı Elemanı

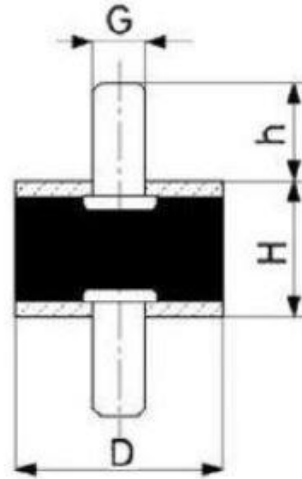

Codice riferimento	D	H	G x l standard	Freccia f (mm)	Sollecitazione statica a compressione - Fz(daN)		
					40° ShA	55° ShA	70° ShA
AD66	6	6	M3x6				
AD67	6	7	M3x6				
AD88	8	8	M3x6	0,4	0,7	1,6	4,5
				0,8	1,5	3,5	9,0
				1,2	2,5	5,5	19,5
AD1010	10	10	M4x10	0,6	1,2	2,5	7,0
				1,2	2,5	6,0	14,5
				1,6	3,5	8,0	20,5
AD1015	10	15	M4x10				
AD158	15	8	M4x10	0,4	3,5	7,5	21,0
				0,8	7,5	15,5	45,0
				1,2	12,0	25,0	74,5
AD1515	15	15	M4x13	0,8	2,0	4,5	12,5
				1,5	4,0	9,5	22,5
				2,5	7,5	17,0	40,0
AD1885	18	8,5	M6x16				
AD2015	20	15	M6x15	1,0	5,5	13,5	28,0
				2,0	11,5	28,5	60,0
				2,5	15,0	37,0	77,5
AD2020	20	20	M6x15	1,0	3,5	8,5	18,0
				2,5	9,0	22,5	47,5
				3,5	13,0	32,5	70,0
AD2025	20	25	M6x15				
AD2515	25	15	M6x18	1,0	9,5	23,0	48,0
				1,5	14,5	36,0	74,5
				2,5	26,0	64,5	134,0
AD2520	25	20	M6x18	1,0	5,5	14,0	29,5
				2,5	15,0	37,0	78,0
				3,5	22,0	54,0	114,5
AD2530	25	30	M6x18				
AD3015	30	15	M8x20	1,0	16,5	29,0	89,0
				2,0	46,0	80,0	195,0
				2,5	61,0	104,5	256,0
AD3020	30	20	M8x20	1,0	10,5	21,0	49,0
				2,5	29,0	57,0	131,5
				3,5	43,0	84,0	194,5
AD3025	30	25	M8x20				