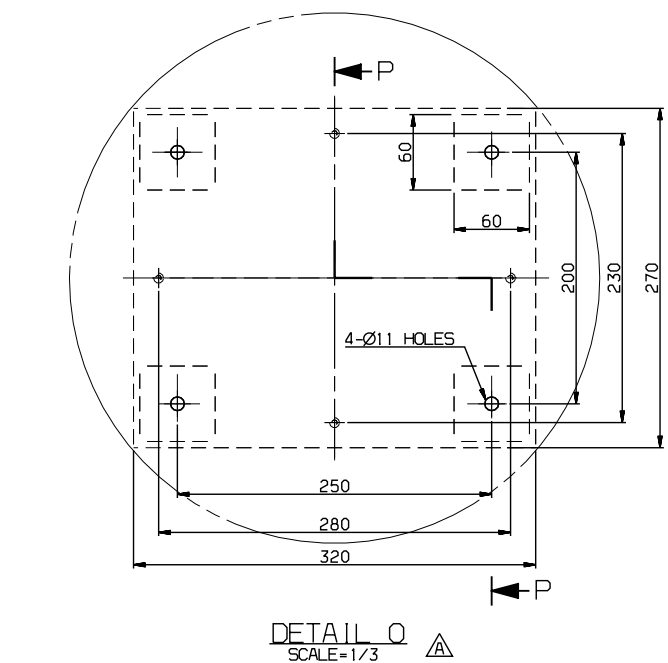
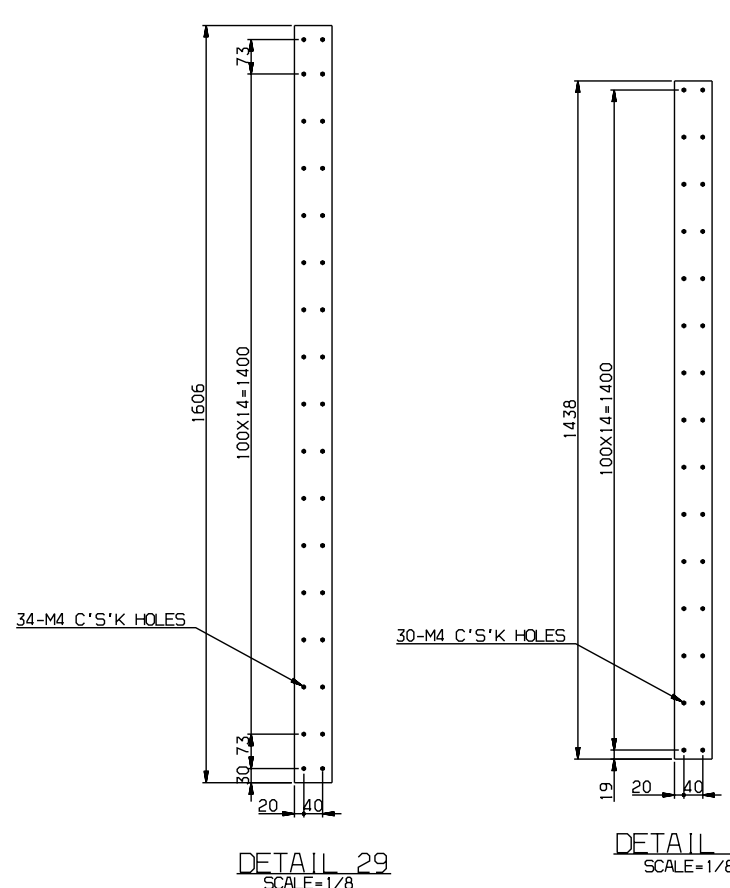
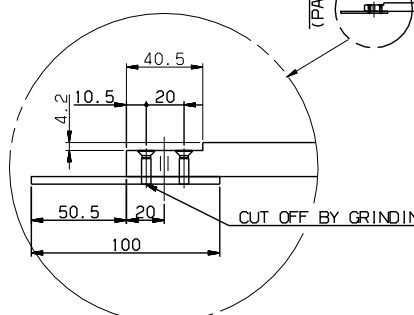


[illegible]

16	RFP24102EJ0	FLOOR, BOARD TYPE 33	ASSY	1			
15	RFP20045AN0	FLOOR, BOARD TYPE 32	ASSY	1			
14	RFP20044AN0	FLOOR, BOARD TYPE 31	ASSY	1			
13	RFP20043AN0	FLOOR, BOARD TYPE 30	ASSY	1			
12	RFP20016AN0	FLOOR, BOARD TYPE 3	ASSY	2			
11	RFP20024AN0	FLOOR, BOARD TYPE 11	ASSY	1			
10	RFP20040AN0	FLOOR, BOARD TYPE 27	ASSY	2			
9	RFP20039AN0	FLOOR, BOARD TYPE 26	ASSY	1			
8	RFP20038AN0	FLOOR, BOARD TYPE 25	ASSY	1			
7	RFP20037AN0	FLOOR, BOARD TYPE 24	ASSY	1			
6	RFP20036AN0	FLOOR, BOARD TYPE 23	ASSY	1			
5	RFP20035AN0	FLOOR, BOARD TYPE 22	ASSY	1			
4	RFP20018AN0	FLOOR, BOARD TYPE 5	ASSY	1			
3	RFP20033AN0	FLOOR, BOARD TYPE 20	ASSY	1			
2	RFP20017AN0	FLOOR, BOARD TYPE 4	ASSY	2			
1	RFP24101EJ0	FLOOR, BOARD TYPE 18	ASSY	1			

ITEM	REQUIREMENT	STANDARD
MOSITURE CONTENT RATIO	LESS THAN 12%	EN 322
SIZE(LEGNTH X WIDTH X T)	2700mm X 1500mm X 18mm	
PLY	MORE THAN 11 PLIES	
SKIN	PHENOL SHEET	
TOLERANCE	LONGITUDINAL : $\pm 0.5\text{mm}$	
	WIDTH : $\pm 1\text{mm}$	
	THICKNESS : $\pm 0.5\text{mm}$	
	RECTANGULARITY : 1mm/m	
MODULUS OF ELASTICITY	MORE THAN 9000 MPa	EN310
BENDING STRENGHT	MORE THAN 60MPa	EN310
SURFACE CONDITION	11/11	SFS 2413
BONDING QUALITY	CLASS 3	EN 314-2
CUTTING SURFACE	IT SHALL BE APPLIED BY THE PAINT OF WATERPROOF PAINT COLOR : WHITE	

품번 NO.	부분 PART NO.	품 DESCRIPTION	재 MATERIAL	수량 Q'TY	중량 W.T	비 REMARKS
출인 APP	JeongYul Lee 2014. 10. 14	MAT'L ASSY	명 A1	FLOOR, BOARD FITTING, M CAR (3/3)		
검 CHK	KeongBong Park 2014. 10. 14	종류 G.W	TITLE			
제 DGN	HeonUk Lee 2014. 10. 14	원 MC	도면 DRG.	번 NO	RFP24002EJ0	Ver. 00 Rev. -A
J.Y. LEE	HeeSook Jeong 2014. 10. 14	B B SIZE	A1	SCALE 1/25	SHEET 3 of 3	
출인 APP	②226 REF. NO.		HYUNDAI RoTeM 현대로템주식회사			